

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 234 959 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
28.08.2002 Bulletin 2002/35

(51) Int Cl.7: F01N 9/00, F01N 3/023,
F02D 41/02

(21) Application number: 02003221.5

(22) Date of filing: 20.02.2002

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 21.02.2001 JP 2001044445
22.02.2001 JP 2001046993

(71) Applicant: ISUZU MOTORS LIMITED
Shinagawa-ku, Tokyo (JP)

(72) Inventors:
• Tashiro, Yoshihisa Isuzu Motors Ltd.
Fujisawa-shi, Kanagawa-ken (JP)

- Imai, Takchito Isuzu Motors Ltd.
Fujisawa-shi, Kanagawa-ken (JP)
- Suzuki, Tsuneo Isuzu Motors Ltd.,
Fujisawa-shi, Kanagawa-ken (JP)
- Ochi, Naofumi
Isuzu Motors Ltd., Fujisawa Factory
Kanagawa-ken (JP)
- Gabe, Masashi Isuzu Motors Ltd.,
Kanagawa-ken (JP)


(74) Representative: Weber, Roland, Dipl.-Chem. et al
Weber, Seiffert, Lieke
Taunusstrasse 5a
65183 Wiesbaden (DE)

(54) Diesel particulate filter unit and regeneration control method of the same

(57) A diesel particulate filter unit 1 comprising a filter 4 for capturing particulates in the exhaust gas G of an engine E, and a regeneration control means 50 judging the start of the regeneration operation of said filter 4, according to the comparison between the value measured by exhaust pressure sensors 51, 52 and a predetermined exhaust pressure judgment value ΔP_{es} , P_{es} , R_{es} wherein said regeneration control means 50 is configured to estimate the ash accumulated quantity SAs

of ash leaked into the exhaust gas G and accumulated in said filter 4, and correct said exhaust pressure judgment value ΔP_{es} , P_{es} , R_{es} for judging the regeneration operation start based on this. Thereby, a diesel particulate filter that can judge the regeneration start timing appropriately, taking accumulation and deposit of ash generated from lubricant oil on the filter into consideration, and remove particulates efficiently all the way preventing the filter from clogging is provided.

Fig. 1

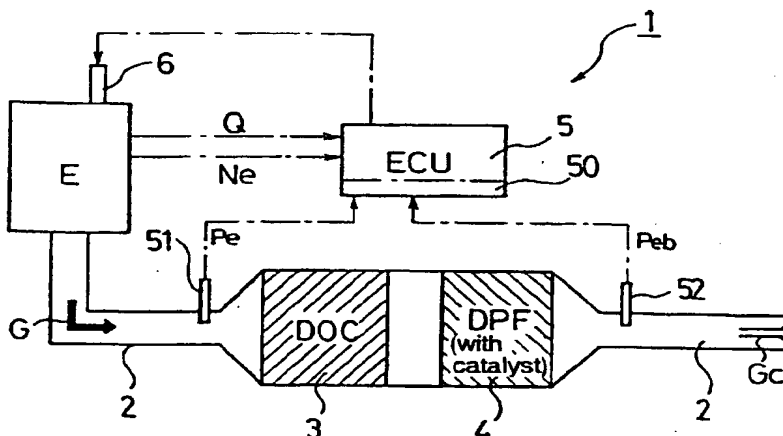

Description

BACKGROUND OF THE INVENTION

[0001] The present invention concerns a continuous regeneration type diesel particulate filter unit for cleaning the exhaust gas by capturing particulate of a diesel engine and a regeneration control method of the same.

[0002] The restriction of discharge quantity of particulate (the PM: particulate: referred to as the PM hereinafter) discharged from the diesel engine is reinforced year by year together with NOx, CO and HC or the others. Therefore, a technique for reducing the quantity of the PM discharged outside, by capturing the PM by means of a filter called diesel particulate filter (DPF: Diesel Particulate Filter: referred to as DPF hereinafter) has been developed.

[0003] The DPF for capturing the PM includes monolith honeycomb form wall flow type filters made of ceramics, fiber filter type filters made of fiber shape ceramics or metal, or the others. The exhaust emission control device using these DPFs are installed in the middle of the engine exhaust pipe, similarly to the other exhaust emission control devices, for cleaning exhaust gas generated in the engine before discharging.

[0004] However, the filter of DPF unit for the PM capture is clogged gradually along with the capture of the PM and the exhaust pressure raises substantially in proportion to the quantity of captured the PM, thus requiring to remove the PM from the filter. Mainly three kinds of method and unit have been developed.

[0005] The first of them concerns a regeneration unit and method of the same for using two filters alternately to capture the PM in exhaust gas by one filter and regenerate by burning the captured the PM heating by the other filter through an electric heater or the like.

[0006] The second method and unit consists in using a solid filter as filter, disposing an oxidation catalyst upstream the solid filter, and treating the PM captured in the solid filter by a chemical reaction based on the oxidation catalyst.

[0007] The third method and unit consists in using a solid filter provided with catalyst and a catalyst additive agent for accelerating the burning of the PM.

[0008] Primary clogging factors of these DPF units include, in addition to smog or the like that are unburned components of the fuel and ash of burned lubricant oil.

[0009] The lubricant oil is supplied to different parts of an engine and the periphery of piston rings from a lubricant oil reservoir to circulate in the engine, and penetrates into the engine cylinder from the peripheries of piston rings and valves.

[0010] When the lubricant oil is exposed to a high temperature in the engine cylinder, calcium, zinc or other ingredients contained in the lubricant oil are not burned and remain as ash, and the ash is contained and borne by the exhaust gas and captured by the filter of a DPF unit.

[0011] Moreover, the ash captured by the filter is not burned and not removed by the filter regeneration operation or the others and accumulated in the filter even slightly. Lubricant oil leaks extremely slightly on the order of several tens of liter per ten thousand km of traveling; however, its total amount can not be neglected as the mileage increases. If the mileage attains the order of several ten thousand km or a hundred thousand km, the filter clogging due to the ash deposit and accumulation progresses, affecting the exhaust pressure before and after the filter.

[0012] On the other hand, in the DPF unit of the related art, the clogging of filter due to the PM is judged by comparing the exhaust pressure measured before and after the filter and a predetermined exhaust pressure judgment value, and it is so controlled to start the filter regeneration operation, when exhaust pressure, difference pressure, pressure ratio or the others calculated from the measured exhaust pressure exceeds the predetermined judgment value.

[0013] However, the PDF unit of the related art has a problem that the exhaust pressure raises gradually along with the increase of mileage, as the filter clogging due to ash generated from the lubricant oil is not considered, making the judgment to start the regeneration operation becomes gradually inappropriate.

[0014] Besides, the second and the third units are units for lowering the burning start temperature of the PM by the function of a catalyst such as γ alumina, Pt, zeolite, or the like supported by the filter, and incinerating the PM by the exhaust gas, called "continuous regeneration type DPF".

[0015] In case of the continuous regeneration type DPF, the temperature of exhaust gas flowing in the PDF may be increased to a temperature for activating the catalyst (par example, equal or superior to 250 °C).

[0016] The PM cleaning mechanism in the exhaust gas is different according to engine operation areas (torque and engine speed) (C1), (C2) as shown in Fig. 17.

[0017] First, in the area (C1), carbon (C : the PM) is oxidized to carbon dioxide (CO₂) through a reaction ($4\text{CeO}_2 + \text{C} \rightarrow 2\text{Ce}_2\text{O}_3 + \text{CO}_2$, $2\text{Ce}_2\text{O}_3 + \text{O}_2 \rightarrow 4\text{CeO}_2$) by catalytic action of the a filter with catalyst 4, while in the area (C2), carbon (C : the PM) is oxidized to carbon dioxide (CO₂) through a reaction ($\text{C} + \text{O}_2 \rightarrow \text{CO}_2$).

[0018] Then, in the engine operation areas (torque and engine speed) (C1), (C2) as shown in Fig. 17, the PM in the exhaust gas G is cleaned continuously regenerating the filter with catalyst 4, by cleaning the PM captured by the filter with catalyst 4. It should be appreciated that though the division between these (C1) and (C2) is schematically shown in Fig. 17, there is not necessarily a clear boundary, but main reaction varies gradually.

[0019] However, for the continuous regeneration type DPF unit, in case where the exhaust gas temperature corresponding to the engine operation area (D) in Fig. 17 is low, the catalyst temperature lowers deteriorating

the catalyst activity, and therefore, the aforementioned action does not occur, and the filter can not be regenerated by oxidizing the PM. Consequently, the PM continues to accumulate, clogging the filter.

[0020] Especially, during idling or low load driving, and during engine brake operation on a downhill or the others, the fuel burns hardly, and a cool exhaust gas flows into the filter with catalyst, lowering the catalyst temperature and deteriorating the catalyst activity. Moreover, the PM deposits on the filter during the driving period of time where the filter can not be regenerated.

BRIEF SUMMARY OF THE INVENTION

[0021] The first object of the present invention is to provide a diesel particulate filter unit (DPF unit) allowing to judge appropriately the start timing of regeneration operation, by estimating the state of accumulation of ash generated from a lubricant oil and correcting or compensating the exhaust pressure judgment value concerning the exhaust pressure used for judging the regeneration start, with the ash accumulated estimation value, and to remove the PM efficiently, all the way preventing the filter from clogging.

[0022] The second object of the present invention is to provide a DPF unit allowing to remove the PM efficiently all the way preventing securely the filter from clogging, by controlling the engine exhaust gas temperature, through surveillance of the accumulation state of the PM.

[0023] The DPF unit for achieving the first object is configured as follows.

1) A DPF unit comprising a filter for capturing particulates in the exhaust gas of a diesel engine, an exhaust pressure sensors disposed in an exhaust passage, and a regeneration control means for starting the regeneration operation of said filter, according to the judgment results based on the comparison between the exhaust pressure measured by the exhaust pressure sensors and a predetermined exhaust pressure judgment value, and regenerating said filter by removing particulates captured by said filter through combustion or chemical reaction by a catalyst, wherein said regeneration control means is configured to estimate the ash accumulated quantity of ash leaked into the exhaust gas and accumulated in said filter and to correct said exhaust pressure judgment value for judging the regeneration operation start based on said ash accumulated estimation value.

Concerning the DPF unit and its regeneration operation, as follows, there are regeneration operations corresponding respective type of PDF unit; the other PDF units or regeneration operations may be devised.

The regeneration operation used often for a PDF unit changing over a plurality of filters alter-

nately includes an operation to incinerate particulates by turning on a heating heater disposed in the filter and heating the filter to the particulate combustion temperature or higher. Moreover, the regeneration operation for a DPF unit supporting a catalyst by the filter includes an operation for removing particulates through a chemical reaction by the catalyst, by raising the exhaust gas temperature.

Besides, the judgment based on the comparison between the exhaust pressure measured by the exhaust pressure sensors and the predetermined exhaust pressure judgment value includes manners of judgment described below, or manners of judgment by the combination thereof; however, the other judgments may be adopted provided that they use the exhaust pressure and the predetermined exhaust pressure judgment value.

One of them consists in comparing the exhaust pressure P_e measured by an exhaust pressure sensors disposed upstream the filter and a predetermined exhaust pressure judgment value P_{es} , and starting the regeneration operation when the measured exhaust pressure P_e exceeds the predetermined exhaust pressure judgment value P_{es} .

Another one consists in comparing the differential pressure $\Delta P_e = P_e - P_{eb}$ between the exhaust pressure P_e measured by an exhaust pressure sensors disposed upstream the filter and the exhaust pressure P_{eb} measured by an exhaust pressure sensors disposed downstream the filter with a predetermined exhaust pressure judgment value ΔP_{es} , and starting the regeneration operation when the measured exhaust pressure ΔP_e exceeds the predetermined exhaust pressure judgment value ΔP_{es} .

Besides, there is also a judgment method for comparing the pressure ratio $R_e = P_e/P_{eb}$ and a predetermined pressure ratio judgment value R_{es} , in place of differential pressure ΔP_e , and starting the regeneration operation when the measured pressure ratio R_e exceeds the predetermined pressure ratio judgment value R_{es} .

2) The aforementioned DPF unit, wherein the regeneration control means is configured to calculate the ash quantity accumulated in said filter during an engine operation state, from the torque of an engine and the engine speed, and to calculate the ash accumulated estimation value, through the cumulative computation of the calculated ash quantity.

For calculating the ash quantity Ash of combustion remaining ash of leaked lubricant oil depositing and accumulating on the filter during the operation state of an engine, from the torque Q of the engine and the engine speed N_e , a map data $M_{ash}(Q, N_e)$ and a function $f_{ash}(Q, N_e)$ are prepared, and they are used. The map data M_{ash} is to be determined beforehand from the relation between the torque Q of an engine and the engine speed N_e obtained by

experiment and computation, and the ash quantity Ash to be accumulated in the filter during such engine operation state.

The ash quantity can be determined from the quantity of lubricant oil consumed according to the engine operation state, by means of experiment or computation. Besides, as an ash quantity is produced on the order of 8 g to 10 g by one (1) liter of lubricant oil, the map data $M_{ash}(Q, N_e)$ and the function $f_{ash}(Q, N_e)$ can also be obtained by converting the exhaust pressure increment due to the clogging of the filter with the ash quantity, from the ash quantity.

3) The aforementioned DPF unit, wherein the regeneration control means are configured to calculate an exhaust pressure coefficient corresponding to said ash accumulated estimation value, and correct said exhaust pressure judgment value to a value determined by multiplying a reference judgment value by the exhaust pressure coefficient.

In short, an exhaust pressure coefficient α_1 corresponding to the ash accumulated estimation value $S_{Ash} = \sum (Ash \times \Delta t)$ is calculated, the reference judgment value ΔP_{e0} , P_{e0} , ReO is multiplied by the exhaust pressure coefficient α_1 to determine the value of $\alpha_1 \times \Delta P_{e0}$, $\alpha_1 \times P_{e0}$, $\alpha_1 \times ReO$ and the reference judgment value ΔP_{e0} , P_{e0} , ReO is replaced, by the value, to correct.

4) The aforementioned DPF unit, wherein the regeneration control means is configured to calculate the reference judgment value, from the torque of an engine and the engine speed, of the time when the exhaust pressure for judging the regeneration start timing is measured by an exhaust pressure sensor.

[0024] In the calculation of the reference judgment value ΔP_{e0} , P_{e0} , ReO also, the reference judgment value ΔP_{e0} , P_{e0} , ReO for judging the regeneration start timing concerning the operation state of an engine presenting an engine torque Q and an engine speed N_e is obtained beforehand by experiment or computation, they are prepared as map data $M_{\Delta P_{e0}}(Q, N_e)$, $M_{P_{e0}}(Q, N_e)$, $M_{ReO}(Q, N_e)$ or function $f_{\Delta P_{e0}}(Q, N_e)$, $f_{P_{e0}}(Q, N_e)$, $f_{ReO}(Q, N_e)$, and they are used.

[0025] The regeneration control method of the DPF unit for achieving the aforementioned first object is configured as follows.

1) In a diesel particulate filter unit comprising a filter for capturing particulates in the exhaust gas of a diesel engine, exhaust pressure sensors disposed in an exhaust passage, and a regeneration control means for starting the regeneration operation of said filter, according to the judgment results based on the comparison between the exhaust pressure measured by the exhaust pressure sensors and a predetermined exhaust pressure judgment value, and regenerating said filter by removing particu-

lates captured by said filter through combustion or chemical reaction by a catalyst, the ash accumulated quantity of ash leaked into the exhaust gas and accumulated in said filter is estimated and said exhaust pressure judgment value for judging the regeneration operation start based on an ash accumulated estimation quantity is corrected.

2) The regeneration control method of the aforementioned DPF unit, configured to calculate the ash quantity accumulated in said filter during an engine operation state, from the torque of an engine and the engine speed, and to calculate the ash accumulated estimation value, through the cumulative computation of the calculated ash quantity.

3) The regeneration control method of the aforementioned DPF unit, configured to calculate an exhaust pressure coefficient corresponding to the ash accumulated estimation value, and correcting the exhaust pressure judgment value, to a value determined by multiplying the reference judgment value by the exhaust pressure coefficient.

4) The regeneration control method of the aforementioned DPF unit, configured to calculate the reference judgment value, from the torque of an engine and the engine speed, of the time when the exhaust pressures for judging the regeneration start timing are measured by exhaust pressure sensors.

[0026] According to the DPF unit of the aforementioned composition and the regeneration control method of the same, the following functional effects can be obtained.

[0027] The effect of accumulation in the filter of ash left after the combustion of lubricant oil leaking from the cylinder of an engine into the exhaust gas is reflected on the judgment of regeneration start timing, because the exhaust pressure judgment value to be used for judging the regeneration operation start is corrected or compensated with the accumulated estimation value (deposit calculated value) of the lubricant oil, all the way estimating the state of accumulation and deposit on the filter of ash left after the combustion of lubricant oil of the engine. As the result, the judgment of regeneration start timing is performed always appropriately.

[0028] Then, the ash quantity accumulating in the filter is calculated from the torque of the engine and the engine speed, using the relation between torque of the engine and engine speed and ash accumulation quantity, determined beforehand through experiment or computation, and the ash accumulated estimation value can be estimated correctly by a simple algorithm, by calculating the accumulated estimation value through a cumulative computation of the ash quantity.

[0029] In addition, for the correction of exhaust pressure judgment value, as an exhaust pressure coefficient corresponding to the accumulated estimation value is calculated, and the exhaust pressure judgment value is corrected to a value determined by multiplying the ref-

erence judgment value by the exhaust pressure coefficient, the operation for reflecting the effect of lubricant oil on the judgment of regeneration start timing becomes an extremely simple computation.

[0030] Moreover, as the reference judgment value is calculated from the torque of engine and the engine speed of the time when the exhaust pressure for judging the regeneration start timing, using the relation between torque of the engine and engine speed and ash accumulation quantity, determined beforehand through experiment or computation, and the exhaust pressure judgment value is calculated from the reference judgment value, the measured exhaust pressure and the exhaust pressure judgment value for comparison judgment result in being able to be compared one the other for the operation state of a same engine. Consequently, the difference of exhaust pressure due to the difference of operation state of the engine is cancelled, the judgment of regeneration start timing can be performed more finely and appropriately.

[0031] As a result, the regeneration start timing of the filter of the DPF unit can be judged correctly, even when the mileage of a diesel engine vehicle having the DPF unit on board. Consequently, it can travel removing the PM efficiently by preventing the filter from clogging.

[0032] Moreover, a DPF unit for achieving the second object is configured as follows.

1) A continuous regeneration type diesel particulate filter unit comprising a filter with catalyst for capturing particulates in the exhaust gas from a diesel engine and, burning the captured particulates by catalytic action, wherein an oxidation catalyst is disposed upstream the filter with catalyst, for raising the exhaust gas temperature through oxidation of HC and CO in the exhaust gas.

According to the configuration, the oxidation catalyst disposed upstream the continuous regeneration type filter with catalyst can oxidize carbon monoxide (CO) and unburned fuel (HC) or the like in the exhaust gas, for raising the exhaust gas temperature flowing into the filter with catalyst. Therefore, the temperature of the filter with catalyst can raise even in an engine operation state at a relatively low exhaust gas temperature, allowing to burn and remove particulates (the PM) being captured.

Then, in a normal operation, during an operation state (A) of an engine of low revolution speed, the PM are burned and removed by raising the exhaust gas temperature, through execution of fuel injection control such as retard operation of main injection timing and post injection or the like, as mentioned below, when the filter with catalyst comes to be clogged.

2) The aforementioned continuous regeneration DPF unit comprising a regeneration control means for performing a regeneration processing against the clogging of said filter with catalyst and, wherein

said regeneration control means is configured to activates said oxidation catalyst by raising the exhaust gas temperature through fuel injection control of an engine, during regeneration of said filter with catalyst under an engine operation condition where the exhaust gas temperature of the engine is lower than the activation temperature of said oxidation catalyst, for burning and removing particulates captured by said filter with catalyst.

According to the configuration, the exhaust gas temperature raises, the oxidation catalyst is activated and the temperature of exhaust gas passing through the oxidation catalyst raises furthermore, through execution of fuel injection control such as retard operation of main injection timing and post injection or the like, even in an operation state of an engine of low torque and low revolution speed, where the exhaust gas temperature is low, and the captured particulates can not be burned and removed, by a continuous regeneration type DPF unit of the related art.

Therefore, the temperature of the filter with catalyst raised, and particulates captured by the filter with catalyst are burned and removed by catalytic action of the filter with catalyst. Consequently, the filter with catalyst is not clogged even during a prolonged idling operation, a low speed operation, or a downhill traveling operation where the engine brake is activated, allowing to capture continuously particulates in the exhaust gas.

On the other hand, as combustion of particulate is made to be controlled by controlling the exhaust gas temperature through retard operation of main injection timing or post injection of fuel injection, without using a heating heater, the fuel injection comes to be performed by a fuel injection control unit which is already installed. Consequently, it becomes unnecessary to install additionally a heater for heating, a power supply, or other new equipment or new control units, allowing to make the whole unit compact. Consequently, it results in an unit that can be attached simply to a vehicle.

3) The aforementioned continuous regeneration type DPF unit, configured to raise the exhaust gas temperature by said fuel injection control in multiple stages equal or superior to two stages.

According to the configuration, the exhaust gas temperature is raised in multiple stages equal or superior to two stages, preventing an uncontrolled combustion from occurring when the PM accumulated in the filter with catalyst burns suddenly in a manner of chain reaction, and avoiding damage of the filter with catalyst when its temperature becomes equal or superior to the fusion damage temperature.

4) Also, the aforementioned continuous regeneration type DPF unit, wherein said fuel injection control is configured to comprise, at least, either one of

retard operation of main injection or post injection operation.

[0033] According to the configuration, as retard operation of main injection and post injection operation are adopted as fuel injection control, one can cope only by changing the program of an existing fuel injection control unit, and the filter regeneration becomes possible relatively simply even in a low torque, low revolution speed area of an engine.

[0034] In addition, the regeneration control method of the continuous regeneration type DPF unit for achieving the aforementioned second object is configured as the following method.

1) In a continuous regeneration type diesel particulate filter unit formed by comprising a filter with catalyst for capturing particulates in the exhaust gas from a diesel engine and, burning the captured particulates by catalytic action, and an oxidation catalyst disposed upstream the filter with catalyst, for raising the exhaust gas temperature through oxidation of HC and CO in the exhaust gas, a method configured to raise the exhaust gas temperature through fuel injection control of the engine, during the regeneration of said filter with catalyst under an engine operation condition where the exhaust gas temperature of the engine is lower than the activation temperature of said oxidation catalyst, in order to burn and remove particulates captured by said filter with catalyst.

According to the aforementioned method, the exhaust gas temperature raises, the oxidation catalyst is activated and the captured particulates are burned and removed by catalytic action of the filter with catalyst, through execution of fuel injection control such as retard operation of main injection timing and post injection or the like, in an operation state of an engine of low torque and low revolution speed, where the exhaust gas temperature is low, the oxidation catalyst is poorly active, and the captured particulates can not be burned and removed, by a regeneration control method for continuous regeneration type DPF unit of the related art. Therefore, the filter with catalyst is not clogged even during idling operation, low speed operation, or such a downhill traveling operation that the engine brake is activated, allowing to capture continuously particulates in the exhaust gas.

2) The regeneration control method of the aforementioned continuous regeneration type DPF unit, configured to raise the exhaust gas temperature by said fuel injection control in multiple stages equal or superior to two stages.

According to the method, the exhaust gas temperature is raised in multiple stages equal or superior to two stages, preventing the PM accumulated in the filter with catalyst from burning suddenly in a

manner of chain reaction, and damaging the filter with catalyst when its temperature becomes equal or superior to the fusion damage temperature.

3) The regeneration control method of the aforementioned continuous regeneration type DPF unit, wherein said fuel injection control is configured to comprise, at least, either one of retard operation of main injection or post injection operation.

According to the method, as retard operation of main injection and post injection operation are adopted as fuel injection control, one can cope only by changing the program of an existing fuel injection control unit, and the filter with catalyst can be regenerated relatively simply even in a low torque, low revolution speed area of an engine.

4) The regeneration control method of the aforementioned continuous regeneration type DPF unit, configured to raise at first the exhaust gas temperature through retard operation of fuel main injection and to raise further the exhaust gas temperature, by adding the fuel post injection operation, when the temperature of the exhaust gas flowing into said filter with catalyst attains a predetermined first target temperature value.

According to the method, the exhaust gas temperature is raised through retard operation of main injection timing for preheating the oxidation catalyst, during the start of regeneration mode operation, and after activation of the oxidation catalyst, the post injection is performed, allowing to prevent white smoke from generating, which otherwise tends to generate during the regeneration start.

5) The regeneration control method of the aforementioned continuous regeneration type DPF unit, configured to further raise the exhaust gas temperature, by increasing the injection quantity of fuel post injection, after the temperature of the exhaust gas flowing into said filter with catalyst attains a predetermined second target temperature value by a post injection of fuel of a given quantity, during said fuel post injection operation.

According to the method, a sudden temperature elevation due to a sudden combustion of deposited the PM in a chain reaction manner can be prevented, and the fusion damage of the filter with catalyst can be avoided, because the temperature of exhaust gas entering the filter with catalyst in two stages or multiple stages.

6) The regeneration control method of the aforementioned continuous regeneration type DPF unit, configured to estimate the quantity of particulate to be accumulated in said filter with catalyst during the operation of an engine and the quantity of particulate to be burned and removed from the operation state of the engine, calculate the accumulated estimation value of particulate by cumulative computation, and to judge the regeneration start by using whether the accumulated estimation quantity of the

particulate has exceeded a predetermined accumulation quantity or not.

According to the method, as the regeneration mode operation can be entered, when the accumulated estimation quantity of particulate has exceeded the predetermined accumulation quantity, along with the estimation computation of accumulation state of the particulate, the regeneration of filter with catalyst can be performed with an optimal timing.

[0035] Therefore, the particulate can be captured, burned and removed efficiently, all the way preventing the fuel efficiency from deteriorating.

BRIEF DESCRIPTION OF THE DRAWINGS

[0036]

Fig. 1 is a composition diagram of the diesel particulate filter unit of a first embodiment of the present invention;

Fig. 2 is a flow diagram illustrating a judgment flow of regeneration start timing of the diesel particulate filter unit of the first embodiment of the present invention;

Fig. 3 is a flow diagram illustrating a correction flow of exhaust pressure judgment value;

Fig. 4 is a schematic diagram of map data showing the relation between torque of engine and engine speed, and ash quantity to be accumulated in a filter within a unit period of time;

Fig. 5 is a diagram showing the relation between ash accumulated estimation value and exhaust pressure coefficient;

Fig. 6 is a schematic diagram of map data showing the relation between torque of engine and engine speed, and reference judgment value for judging the regeneration start timing;

Fig. 7 is a composition diagram of the continuous regeneration type diesel particulate filter unit of a second embodiment of the present invention;

Fig. 8 is a flow diagram showing a regeneration control method of the continuous regeneration type diesel particulate filter unit of the second embodiment of the present invention;

Fig. 9 is a flow diagram for estimation computation of the PM accumulated estimation value;

Fig. 10 is a flow diagram of a temperature elevation first stage of preliminary heating by the retard of main injection of fuel injection;

Fig. 11 is a flow diagram of a temperature elevation second stage of the PM combustion start by a post injection of a fixed quantity of fuel injection;

Fig. 12 is a flow diagram of a temperature elevation third stage of the PM combustion by an increase of post injection quantity of fuel injection;

Fig. 13 is a flow diagram of a temperature elevation forth stage of the PM purge by a further increase of

post injection quantity of fuel injection;

Fig. 14 is a time series diagram showing the chronic evolution of DPF entrance temperature in the regeneration mode operation;

Fig. 15 is a diagram showing a map data of the PM quantity used for calculating the PM accumulated estimation value, (a) a diagram showing the balance point, (b) a diagram showing a portion where the map data of a the PM accumulation area (A) exists, and (c) a diagram showing a portion where the map data of a the PM accumulation area (B) exists;

Fig. 16 is a diagram for judgment of the PM accumulated estimation value at the regeneration mode operation start, (a) a diagram showing the relation between values used for judgment and regeneration interval, (b) a diagram showing an engine operation area (B) when the $PM1 \leq PMs < PM2$, and (c) a diagram showing an engine operation area (A + B) when the $PM2 \leq PMs < PM3$; and

Fig. 17 is a diagram showing the relation between the operation area of engine (torque and engine speed) and the mechanism of the PM cleaning in the exhaust gas, in a continuous regeneration type diesel particulate filter unit of the related art.

DETAILED DESCRIPTION OF THE INVENTION

[0037] Now, the diesel particulate filter unit (referred to as DPF unit, hereinafter) of a first embodiment of the present invention shall be described referring to drawings.

[0038] Fig. 1 shows the composition of a DPF unit 1 of the first embodiment. The DPF unit 1 shown in Fig. 1 is a continuous regeneration type DPF unit, installed in a exhaust passage 2 of an engine E, having an oxidation catalyst 3 and a filter with catalyst 4 disposed from the upstream side.

[0039] In addition, a first exhaust pressure sensors 51 is installed at the exhaust entrance side of the oxidation catalyst 3, and, a second exhaust pressure sensors 52 is installed at the exhaust exit side of the filter with catalyst 4, for controlling the regeneration of the filter with catalyst 4.

[0040] Output values P_e , P_{eb} from these sensors are input to an engine control unit (ECU : Engine Control Unit) 5 controlling generally the engine operation and, at the same time, including a regeneration control means 50 for performing regeneration control and regeneration operation of the filter with catalyst 4, and a control signal output from the control unit 5 controls a fuel injection unit 6 of the engine E.

[0041] On the other hand, the oxidation catalyst 3 is formed by supporting an oxidation catalyst such as platinum (Pt)/ γ alumina or the others, on a support of honeycomb structure made of porous ceramics or the others. The filter of the filter with catalyst 4 is formed with

a monolith honeycomb form wall flow type filter where the inlet and the outlet of a channel of a honeycomb made of porous ceramics are obtruded alternately, a felt shape filter made by laminating randomly organic fibers of alumina or the like, or the others. It is composed by supporting a catalyst such as platinum (Pt)/ γ alumina or the others on a portion of the filter.

[0042] Then, in case of adopting a monolith honeycomb form wall flow type as filter of the filter with catalyst 4, particulates (referred to as the PM hereinafter) in an exhaust gas G are trapped by a porous ceramic wall. In case of adopting a fiber form filter type, the PM are trapped by organic fibers of the filter.

[0043] Next, a regeneration control method in the DPF unit 1 of the aforementioned composition shall be described.

[0044] The regeneration control method is executed by a control program loaded on the control unit 5, or a regeneration control means 50 formed of a control program loaded on the control unit 5, input/output units, or the others, and the judgment of the start of regeneration operation is performed according to a judgment flow of regeneration start timing as illustrated in Fig. 2.

[0045] The judgment flow of regeneration start timing as illustrated is executed in parallel with a (not shown) control flow of the engine E, and a correction flow of exhaust pressure judgment value as shown in Fig. 3 described below. In addition, as necessary, a judgment of regeneration operation start is performed by inputting, an exhaust pressure judgment value ΔP_{es} for judgment of regeneration operation start corrected by the correction flow of the exhaust pressure judgment value of Fig. 3, and in case of judging as start timing, an indication of starting the regeneration mode operation which is a regeneration process is emitted.

[0046] In short, it is so composed that the flow is called and executed reiteratively every fixed time, with the correction flow of the exhaust pressure judgment value, during the operation control of the engine E, and upon termination of the control of the engine E, these flows are not called no more, and substantially, the regeneration operation of the filter with catalyst 4 terminates at the same time.

[0047] In the judgment flow of regeneration start timing shown in Fig. 2, at the start, an exhaust pressure P_e measured by the first exhaust pressure sensors 51 installed upstream the filter 4 and an exhaust pressure P_{eb} measured by the second exhaust pressure sensors 52 installed downstream the filter 4 are input for judging the regeneration control start, in a step S110.

[0048] In a step S120, a differential pressure $\Delta P_e = P_e - P_{eb}$ is calculated, and in a step S130, an exhaust pressure judgment value ΔP_{es} for judging the regeneration control start corrected by the correction flow of the exhaust pressure judgment value of Fig. 3 is input.

[0049] Then, in a step S140, the differential pressure ΔP_e and a predetermined exhaust pressure judgment value ΔP_{es} are compared, and when the measured ex-

haust pressure ΔP_e exceeds the predetermined exhaust pressure judgment value ΔP_{es} , the start of regeneration mode operation is indicated in a step S150 before return, and if not exceeding, it returns as it is.

[0050] As processes of the regeneration mode operation, in the DPF unit 1 of Fig. 1, the exhaust gas temperature raises and the oxidation catalyst 3 is activated by the retard of main injection and, furthermore, by the execution of post injection, in the fuel injection control. At the same time, the PM is removed through chemical reaction by the catalyst supported by the filter with catalyst 4, thus regenerating the filter with catalyst 4.

[0051] Then, concerning exhaust pressure judgment value ΔP_{es} for judging the regeneration control start to be used for the foregoing, it is so configured that the ash accumulated quantity S_{Ash} of combustion remaining ash of lubricant oil of the engine E leaked into the exhaust gas G and accumulated in the filter 4 is estimated and the exhaust pressure judgment value ΔP_{es} is corrected and compensated based on the ash accumulated estimation value S_{Ash} .

[0052] These correction and compensation are carried out according to the correction flow of the exhaust pressure judgment value as illustrated in Fig. 3.

[0053] When the flow starts, first of all, in a step S210, torque Q and engine speed N_e indicating the operation state of the engine E are input. In a following step S220, from these torque Q and engine speed N_e , the ash quantity A_{sh} of ash to be accumulated in the filter 4 within a unit time (Δt) are calculated from a preliminarily input map data $M_{ash}(Q, N_e)$ as shown in Fig. 4.

[0054] For the value of the map data $M_{ash}(Q, N_e)$, the ash quantity A_{sh} of ash to be accumulated in the filter with catalyst 4 corresponding the torque Q and engine speed N_e is determined, through a preliminary experiment, computation or the others, and input beforehand in the regeneration control means 50. It should be appreciated that it may be input beforehand in the regeneration control means 50, as a function $f_{ash}(Q, N_e)$ calculating A_{sh} from Q and N_e in place of map data.

[0055] In a step S230, the calculated ash quantity A_{sh} is added to the ash accumulated estimation value S_{Ash} ($S_{Ash} = S_{Ash} + A_{sh} \times \Delta t$).

[0056] In short, the regeneration control means 50 is configured so that the ash quantity A_{sh} of ash to be accumulated in the filter with catalyst 4 in an operation state of an engine E is calculated from the torque Q and engine speed N_e of that engine E, and the calculated ash quantity A_{sh} is submitted to a cumulative computation, for calculating the ash accumulated estimation value $S_{Ash} = \Sigma (A_{sh} \times \Delta t)$.

[0057] Then, in a step S240, as shown in Fig. 5, an exhaust pressure coefficient α_1 corresponding to the ash accumulated estimation value S_{Ash} is calculated, and in a step S250, a reference judgment value ΔP_{e0} in an operation state of an engine E is determined from the torque Q and engine speed N_e of that engine E of the time when exhaust pressures P_e , P_{eb} for judgment

of regeneration start timing are measured by the exhaust pressure sensors 51, 52.

[0058] In the calculation of reference judgment value ΔPe_0 also, the reference judgment value $\Delta Pe_0(Q, Ne)$ for judgment of start timing of regeneration operation concerning the operation state of an engine of engine torque Q and engine speed Ne is determined beforehand by experiment or computation, and the same is prepared as map data $M\Delta pe(Q, Ne)$ or function $f\Delta pe_0(Q, Ne)$ and the same is used.

[0059] Then, in a step S260, the exhaust pressure judgment value ΔPes is corrected (compensated), and the correction is realized by substituting the exhaust pressure judgment value ΔPes with a value $\alpha_1 \times \Delta Pe_0$ determined by the reference judgment value ΔPe_0 by an exhaust pressure coefficient α_1 , namely, $\Delta Pes = \alpha_1 \times \Delta Pe_0$ being assumed.

[0060] At last, in a step S260, the corrected exhaust pressure judgment value ΔPes is output, before Return.

[0061] According to the DPF unit 1 of the first embodiment of the aforementioned composition and the regeneration control method of the same, the following effects can be expected.

[0062] The effect of accumulation in the filter with ash 4 of ash left after the combustion of lubricant oil leaking from the combustion chamber of an engine E into the exhaust gas G on the exhaust pressure Pe , Pe_b can be reflected on the judgment of regeneration start timing, because the exhaust pressure judgment value ΔPes to be used for judging the regeneration operation start is corrected with the ash accumulated estimation value $SAsh$, all the way estimating the state of accumulation on the filter with catalyst 4 of ash left after the combustion of lubricant oil of the engine E . As the result, the judgment of regeneration start timing is performed always appropriately.

[0063] Then, the ash quantity Ash accumulating in the filter with catalyst 4 is calculated, using the relation between torque Q of engine and engine speed Ne , and ash accumulation quantity Ash accumulating or depositing in the filter with catalyst 4 in such engine operation state, and the ash accumulated estimation value can be estimated correctly by a simple algorithm, by calculating the accumulated estimation value $SAsh$ through a cumulative computation of the ash quantity.

[0064] In addition, as the correction of exhaust pressure judgment value ΔPes is realized by a simple computation of substituting with a value $\alpha_1 \times \Delta Pe_0$ determined by multiplying the reference judgment value ΔPe_0 by an exhaust pressure coefficient α_1 corresponding to the accumulated estimation value $SAsh$, the operation for reflecting the effect of ash of lubricant oil on the judgment of regeneration start timing can be performed by an extremely simple computation.

[0065] Moreover, as the reference judgment value ΔPe_0 is calculated from the torque Q of engine and the engine speed Ne , determined beforehand through experiment or computation, the measured exhaust pres-

sure Pe , Pe_b and the exhaust pressure judgment value ΔPes for comparison can be compared one the other for the operation state of a same engine. Consequently, the difference of exhaust pressure Pe , Pe_b due to the difference of operation state of the engine is cancelled, and the judgment of regeneration start timing can be performed more finely.

[0066] It should be appreciated that concerning the judgment of start timing of the regeneration operation; in addition to the embodiment, there is also a DPF unit for starting the regeneration operation, when a measured exhaust pressure Pe exceeds a predetermined exhaust pressure judgment value Pes , by comparing the exhaust pressure Pe measured by the exhaust pressure sensors 51 installed upstream the filter 4 and the predetermined exhaust pressure judgment value Pes and a regeneration control method of the same.

[0067] There is also a DPF unit for comparing the pressure ratio $Re = Pe/Pe_b$ of an exhaust pressure Pe measured by the exhaust pressure sensors 51 installed upstream the filter 4 and an exhaust pressure Pe_b measured by the exhaust pressure sensors 52 installed downstream the filter 4 and a predetermined pressure ratio judgment value Res , and starting the regeneration operation when the measured pressure ratio Re exceeds the predetermined pressure ratio judgment value Res and a regeneration control method of the same.

[0068] Besides, there are DPF units and regeneration control methods thereof by the combination of these several judgments; however, the DPF unit and regeneration control method of the present invention includes not only these DPF units and regeneration control methods thereof, but also the other DPF units and regeneration control methods thereof using the exhaust pressure for judging the start timing of regeneration operation.

[0069] Now, the continuous regeneration type DPF unit of a second embodiment of the present invention shall be described referring to the drawings.

[0070] Fig. 7 shows the composition of the continuous regeneration type DPF unit of the second embodiment. The continuous regeneration type DPF unit 1A is a unit installed in an exhaust passage 2 of an engine E , having an oxidation catalyst 3 and a filter with catalyst 4 disposed from the upstream side.

[0071] In addition, a first exhaust pressure sensors 51 is installed at the exhaust entrance side of the oxidation catalyst 3, and, first temperature sensors 53 between the oxidation catalyst 3 and the filter with catalyst 4, a second exhaust pressure sensors 52 and a second temperature sensors 54 at the exhaust exit side of the filter with catalyst 4, for controlling the regeneration of the filter with catalyst 4.

[0072] Output values from these sensors are input to an engine control unit (ECU : Engine Control Unit) 5 performing a general control of the engine operation and, at the same time, performing the regeneration control of the filter with catalyst 4, and a control signal output from

the control unit 5 controls a fuel injection unit 6 of the engine.

[0073] On the other hand, the oxidation catalyst 3 is formed by supporting an oxidation catalyst such as platinum (Pt)/ γ alumina, zeolite or the others, on a support of honeycomb structure made of porous ceramics or the others, and the filter with catalyst 4 is formed with a monolith honeycomb form wall flow type filter where the inlet and the outlet of a channel of a honeycomb made of porous ceramics are obtruded alternately, a felt shape filter made by laminating randomly organic fibers of alumina or the like, or the others. It is composed by supporting a catalyst such as Pt, γ alumina, zeolite or the others on a portion of the filter.

[0074] Then, in case of adopting a monolith honeycomb form wall flow type as filter of the filter with catalyst 4, particulates (referred to as the PM hereinafter) in an exhaust gas G are trapped by a porous ceramic wall, while in case of adopting a fiber form filter type, the PM are trapped by organic fibers of the filter.

[0075] Next, a regeneration control method in the continuous regeneration type DPF unit 1A of the aforementioned second embodiment be described.

[0076] The regeneration control method is executed according to a flow as illustrated in Fig. 8 to fg13.

[0077] For the convenience of description, these illustrated flows are shown as regeneration control flows called and executed reiteratively, in parallel with a control flow of the engine E. In short, it is so composed that the flow is called and executed reiteratively every fixed time in parallel during the operation control of the engine E, and upon termination of the control of the engine E, these flows are not called no more, and substantially, the regeneration operation of the filter with catalyst 4 terminates at the same time.

[0078] The regeneration control flow is configured to start the regeneration mode operation not only when the exhaust pressure P_e to be detected by the first exhaust pressure sensors 51 exceeds a predetermined first exhaust pressure judgment value P_{max} , but also when the accumulation quantity of the PM in the filter with catalyst 4, namely the PM accumulated estimation value the PMs exceeds a predetermined the PM judgment value the PMmax.

[0079] In the regeneration control flow illustrated in Fig. 8, first of all, in a step S21, it is judged if the PM accumulated estimation value the PMs exceeds the predetermined the PM judgment value the PMmax, or if the exhaust pressure P_e exceeds the predetermined first exhaust pressure judgment value P_{max} , and if either one is the case, it shifts to the regeneration mode operation in a step S30, and if neither one is the case, it Returns.

[0080] The flow of the regeneration mode operation in the step S30 is composed of a series of operations including a cut of EGR (exhaust gas recirculate combustion) in a step S31, a temperature elevation first stage for preheating by retarding the timing of main in-

jection of fuel injection in a step S32, a temperature elevation second stage for performing a post injection in a step S33 and injection of a fixed quantity of fuel for starting the PM combustion, a temperature elevation third stage for burning the PM by incrementing the injection quantity of post injection in a step S34, a temperature elevation fourth stage for purging the PM by incrementing further the injection quantity of post injection in a step S35, and a termination of regeneration mode operation in a step S36.

[0081] Now, each step shall be described in detail.

[Estimation of accumulated value of the PM]

[0082] The calculation of the PM accumulated estimation value the PMs used for judgment of shifting to the regeneration mode operation in the step S21 shall be described in detail.

[0083] The PM accumulated estimation value the PMs is executed according to the PM accumulated estimation flow as illustrated in Fig. 9.

[0084] In the PM accumulated estimation flow of the Fig. 9, when the flow starts, first of all, in a step S11, torque Q and engine speed Ne showing the operation state of the engine E, and, a DPF entrance temperature T1 measured by the first temperature sensors 53 are input.

[0085] In a following next step S12, a DPF entrance temperature Tb at the balance point (BP) is calculated from these torque Q and engine speed Ne by means of a preliminarily input map data Mtb (Q, Ne).

[0086] The balance point means a portion at the boundary of an area (portion A in Fig. 15) where the captured the PM does not burn and the PM are accumulated, because the exhaust gas temperature is low, and the catalyst activity is low, during an ordinary operation without filter regeneration operation or the others and an area (portion B in Fig. 15) where the exhaust gas temperature is high, the captured the PM burns by catalyst action, and the accumulated the PM diminishes, or a portion (on the line C in Fig. 15) in a balanced state without accumulation of the PM on the filter with catalyst 4 nor decrease thereof.

[0087] Then, in a step S13, it is judged if a measured DPF entrance temperature Te is equal or inferior to the DPF entrance temperature Tb at the balance point or not, namely, if it is in the area (portion A in Fig. 15) of the PM accumulation where the operation state of the engine E is in low torque and low revolution speed or not.

[0088] In the judgment of the step S13, if the measured DPF entrance temperature Te is equal or inferior to the DPF entrance temperature Tb at the balance point, namely, if it is in the PM accumulation area (A), in a step S14, the deposited the PM quantity for every such time on the filter corresponding to the torque Q and engine speed Ne is calculated from a preliminarily input the PMa (Q, Ne) map data of Fig. 15(b), and this the deposited the PM quantity is added to the PM accumu-

lated estimation value the PMs, before Return.

[0089] On the other hand, in the judgment of the step S13, if the measured DPF entrance temperature T_e is superior to the DPF entrance temperature T_b at the balance point, namely, if it is in the PM decrease area (B), in a step S15, the PM quantity to be removed corresponding to the torque Q and engine speed N_e is calculated from a preliminarily input the PMb (Q , N_e) map data of Fig. 15(c), and the PM quantity is subtracted to the PM accumulated estimation value the PMs, before going to a step S16.

[0090] In the step S16, it is judged if the PM accumulated estimation value the PMs is larger than zero or not, namely, if the PM is in a deposited state or not and, in the judgment of the step S16, in case where the PM accumulated estimation value the PMs is smaller than zero, the PM accumulated estimation value the PMs is set to zero in a step S17 before Return, and in case of larger than zero, Return as it is.

[Judgment for start of regeneration mode operation]

[0091] In the step S21 of Fig. 8, it is judged if the PM accumulated estimation value the PMs exceeds the predetermined the PM judgment value the PMmax, or if the exhaust pressure P_e exceeds the predetermined first exhaust pressure judgment value P_{emax} , and more precisely, the judgment of the PM accumulated estimation value the PMs is controlled to enter the regeneration mode operation in case where the PM accumulated estimation value the PMs is between the PM1 and the PM2, as shown in Fig. 16(a), and the operation state of engine (torque Q , engine speed N_e) is in an oblique line portion (A) under the balance point of Fig. 16(b) and in case where the PM accumulated estimation value the PMs is between the PM2 and the PM3. It should be appreciated that, in case of between the PM2 and the PM3, the operation state of engine (torque Q , engine speed N_e) is in an oblique line portion (A+B) of Fig. 16(c), namely, in the full operation state.

[Temperature elevation first stage: preliminary heating]

[0092] Then, in a step S32 of Fig. 8, the timing of the main injection of fuel injection is retarded, and the exhaust gas temperature is raised by the retard operation; however, in the step S32, as shown in a detail flow of Fig. 10, in a step S32a, the main injection is retarded, and the exhaust gas temperature is raised by the retard operation. In a next step S32b, it is judged if the DPF entrance temperature (exhaust gas temperature) T_e measured by the first temperature sensors 53 exceeds a predetermined first target temperature T_{e1} (for example 200 to 250 °C) or not, and if it does not exceeds, the retard quantity of main injection of fuel injection is incremented in a step S32c, and the DPF entrance temperature T_e is raised to equal or superior to the first target temperature T_{e1} .

[0093] Moreover, in case where the DPF entrance temperature T_e exceeds the predetermined first target temperature T_{e1} in the step S32b and a predetermined first time value t_1 or more has elapsed, it goes to a step S33.

[0094] A preliminarily heating is performed by the elevation of the exhaust gas temperature and the oxidation catalyst 3 is heated. The temperature elevation and activation of the catalyst avoids generation of white smoke by the post injection.

[0095] It should be appreciated that the retard operation of main injection is sustained up to the termination of the regeneration mode operation.

[Temperature elevation second stage: the PM combustion start]

[0096] In addition, in a step S33 of Fig. 8, the post ignition is performed, and a fixed quantity of fuel is post injected. Furthermore, the exhaust gas temperature is raised until the DPF entrance temperature T_e attains a second target temperature T_{e2} . The second target temperature T_{e2} is a temperature allowing the PM to burn as shown in Fig. 15, higher than the DPF entrance temperature T_b at the balance point by a predetermined temperature (for example 50 °C), of the order of about 250 °C to 350 °C.

[0097] In the step S33, as shown in a detailed flow of Fig. 11, a post injection of a fixed quantity is performed in a step S33a, and further, the DPF entrance temperature T_e is raised to the second target temperature T_{e2} . In a following step S33b, the post injection timing is controlled until the exhaust pressure P_e (or differential pressure ΔP_e) becomes equal or inferior to a predetermined second exhaust pressure value P_{e2b} (or second differential pressure ΔP_{e2}) and the second target temperature T_{e2} is maintained. Also, it can be maintained by controlling the injection quantity.

[0098] The exhaust pressure P_e is an exhaust pressure value measured by the first exhaust pressure sensors 51 at the exhaust entrance side of the oxidation catalyst 3, and the differential pressure ΔP_e is a difference $\Delta P_e = P_e - P_{eb}$ of the exhaust pressure P_e measured by the first exhaust pressure sensors 51 and the exhaust pressure P_{eb} measured by the second exhaust pressure sensors 52 at the exhaust exit side of the filter with catalyst 4.

[0099] Then, in a step S33c, it is judged either if the exhaust pressure P_e (or differential pressure ΔP_e) has become equal or inferior to the predetermined second exhaust pressure value P_{e2} (or second differential pressure ΔP_{e2}), or the second target temperature T_{e2} is maintained for a predetermined second time value t_2 (for example 300s) and if either one is the case, it shifts to a step S34, and neither on is the case, it returns to the step S33b.

[0100] Thereafter, the temperature of the filter with catalyst 4 is raised, to start burning the PM.

[0101] Then, the start of the PM combustion can be confirmed by the fact that the exhaust pressure P_e (or differential pressure ΔP_e) becomes equal or inferior to the predetermined second exhaust pressure value P_{e2} (or second differential pressure ΔP_{e2}).

[Temperature elevation third stage : the PM combustion]

[0102] In a following step S34 in Fig. 8, the ignition amount of post ignition is incremented, the exhaust gas temperature is raised and controlled to be appropriate for the PM combustion, namely, so that the DPF entrance temperature T_e becomes a third target temperature T_{e3} which is superior to the second target temperature T_{e2} . The third target temperature T_{e3} is a temperature higher than the DPF entrance temperature T_b at the balance point by a predetermined temperature (for example 150 °C), of the order of about 350 °C to 500 °C.

[0103] In the step S34, as shown in a detailed flow of Fig. 12, the ignition amount of post ignition is incremented in a step S34a. In a following step S34b, the injection quantity of post injection is controlled until the exhaust pressure P_e (or differential pressure ΔP_e) becomes equal or inferior to a predetermined third exhaust pressure value P_{e3} (or third differential pressure ΔP_{e3}) and the third target temperature T_{e3} is maintained.

[0104] Then, in a step S34c, it is judged either if the exhaust pressure P_e (or differential pressure ΔP_e) has become equal or inferior to the predetermined third exhaust pressure value P_{e3} (or third differential pressure ΔP_{e3}), or the third target temperature T_{e3} is maintained for a predetermined third time value t_3 (for example 600s) and if either one is the case, it shifts to a step S35, and neither one is the case, it returns to the step S34b.

[0105] In the step S34, the PM combustion is performed at an optimal temperature, by controlling the ignition amount of post ignition.

[Temperature elevation fourth stage : the PM purge]

[0106] In a step S35 in Fig. 8, the ignition amount of post ignition is further incremented and controlled so that the DPF entrance temperature T_e becomes a fourth target temperature T_{e4} (for example 600 °C).

[0107] In the step S35, as shown in a detailed flow of Fig. 13, the ignition amount of post ignition is incremented in a step S35a. In a following step S35b, the injection quantity of post injection is controlled until the exhaust pressure P_e (or differential pressure ΔP_e) becomes equal or inferior to a predetermined fourth exhaust pressure value P_{e4} (or fourth differential pressure ΔP_{e4}) and the DPF entrance temperature T_e is maintained at the fourth target temperature T_{e4} .

[0108] Then, in a step S35c, it is judged either if the exhaust pressure P_e (or differential pressure ΔP_e) has become equal or inferior to the predetermined fourth exhaust pressure value P_{e4} (or fourth differential pressure ΔP_{e4}), or the fourth target temperature T_{e4} is main-

tained for a predetermined fourth time value t_4 (for example 300s) and if either one is the case, it shifts to a step S36, and neither one is the case, it returns to the step S35b.

5 [0109] By the temperature elevation operation, it is planned to purge the PM captured in the filter.

[Termination of regeneration mode operation]

10 [0110] Then, in a step S36 shown in Fig. 8, the regeneration mode operation is terminated, the fuel injection is reset to the normal, and at the same time, the PM computation cumulative value the PMs is reset to zero.

15 [0111] It should be appreciated that, if the exhaust pressure P_e is checked and memorized during the regeneration termination, and becomes superior to a predetermined exhaust pressure value P_{emax} , a warning lamp turns on, for informing the driver of the end of life of the filter.

20 [0112] In addition, in respective stages of the aforementioned flow, the DPF entrance temperature T_e is monitored, and if it becomes equal or superior to a limit temperature (T_{emax} : for example 700 °C), the post injection is suspended and, at the same time, the retard operation of main injection is cancelled, interrupting the regeneration mode operation. This allows to avoid the fusion damage of the filter by a sudden temperature elevation due to the PM combustion.

25 [0113] Along with them, in case where the temperature T_{eb} measured by the second temperature sensors 54 installed at the exhaust exit side of the filter with catalyst 4 becomes equal or superior to a predetermined temperature, the torque is decreased automatically, or other engine running operations are performed for preventing the filter with catalyst 4 from fusion damage.

30 [0114] Moreover, in case of interruption of the regeneration processing, the PM remaining quantity the PMs' is estimated from exhaust pressure P_e' at the previous regeneration termination, exhaust pressure P_e'' at the beginning of regeneration of this time, and exhaust pressure P_e at the regeneration interruption, and the PM remaining quantity the PMs' is adopted as the value at the beginning of integration of the PM accumulated estimation value the PMs.

35 [0115] Besides, the relation among the first exhaust pressure value P_{emax} , the second exhaust pressure value P_{e2} (or second differential pressure value ΔP_{e2}), the third exhaust pressure value P_{e3} (or third differential pressure value ΔP_{e3}), and the fourth exhaust pressure value P_{e4} (or fourth differential pressure ΔP_{e4}) decreases in the order. In short, they are in a relation of $P_{emax} > P_{e2} > P_{e3} > P_{e4}$ (or $\Delta P_{e2} > \Delta P_{e3} > \Delta P_{e4}$).

40 [0116] In the regeneration control method of the continuous regeneration type DPF unit of the second embodiment as mentioned above, the regeneration of the filter with catalyst 4 is performed in a time series of the DPF entrance temperature T_e as shown in Fig. 14, as mentioned below.

[0117] If the PM deposits during an engine operation such as ordinary traveling state or idling state or the others, the PM accumulated estimation value the PMs becomes superior to a predetermined judgment value the PMmax or the exhaust pressure P_e becomes superior to the first exhaust pressure value $P_{e\max}$, it shifts to the regeneration mode of the step S30, by the judgment of the step S21 in Fig. 8.

[0118] At the regeneration mode start point of time t_s , EGR (exhaust gas recirculate combustion) is cut in the step S31, and at the same time, the timing of main injection of fuel injection is retarded in the step S32, and the exhaust gas temperature is raised by the retard operation.

[0119] Moreover, if the DPF entrance temperature T_e exceeds the first target temperature T_{e1} (about 200 to 250 °C), in the step S33, the post injection is performed, and a fixed quantity of post injection is executed. Furthermore, the DPF entrance temperature T_e is raised to the second target temperature T_{e2} (about 350 °C), for starting the PM combustion.

[0120] Then, when the start of the PM combustion is confirmed by the fact that the exhaust pressure P_e (or differential pressure ΔP_e) becomes equal or inferior to the predetermined second exhaust pressure value P_{e2} (or second differential pressure ΔP_{e2}), in the step S34, the injection quantity of post injection is incremented, and the DPF entrance temperature T_e is controlled to maintain the third target temperature T_{e3} (about 500 °C), so that the exhaust gas temperature becomes a temperature appropriate for the PM combustion, and the PM combustion is performed at a temperature optimal for the PM combustion.

[0121] Then, combustion of almost all accumulated the PM is confirmed by the fact that the exhaust pressure P_e (or differential pressure ΔP_e) becomes equal or inferior to the predetermined third exhaust pressure value P_{e3} (or third differential pressure ΔP_{e3}), and in a step S35, the injection quantity of post injection is incremented furthermore, for purging the PM captured by the filter.

[0122] Then, the termination of the PM combustion is confirmed by the fact that the exhaust pressure P_e (or differential pressure ΔP_e) becomes equal or inferior to the predetermined fourth exhaust pressure value P_{e4} (or fourth differential pressure ΔP_{e4}), and in the step S36, the regeneration mode operation is terminated, the fuel injection is reset to the normal, and at the same time, the PM computation cumulative value the PMs is reset to zero.

[0123] The filter with catalyst 4 is regenerated by the series of regeneration control.

[0124] According to the aforementioned continuous regeneration type diesel particulate filter (DPF) unit and the regeneration control method of the same, the following effects can be expected.

[0125] The oxidation catalyst disposed upstream the continuous regeneration type filter with catalyst can oxidize carbon monoxide (CO) and unburned fuel (HC) or

the like in the exhaust gas, for raising the exhaust gas temperature flowing into the filter with catalyst; therefore, the temperature of the filter with catalyst can raise even in an engine operation state at a relatively low exhaust gas temperature, allowing to burn and remove particulates (the PM) being captured.

[0126] Then, in a normal operation, during an operation state of an engine of low torque, low revolution speed, or the others where captured particulates are not burned and not removed, the PM can be burned and removed by raising the exhaust gas temperature, through retard operation of main injection timing of fuel injection and post injection.

[0127] Consequently, the filter with catalyst is not clogged even during a prolonged idling operation, a low speed operation, or other operation state of an engine of low torque, low revolution speed, or the others where captured particulates are not burned and not removed, allowing to capture continuously particulates in the exhaust gas.

[0128] On the other hand, as combustion of particulate can be controlled by controlling the exhaust gas temperature through retard operation of main injection timing or post injection of fuel injection, without using a heating heater, the fuel injection can be performed by a fuel injection control unit which is already installed; therefore, it becomes unnecessary to install additionally a heater for heating, a power supply, or other new equipment or new control units, allowing to make the unit compact.

[0129] In addition, the temperature of exhaust gas entering the filter with catalyst is raised in two (2) stages or in multiple stages, allowing to prevent a sudden elevation of temperature provoked by a sudden combustion of deposited the PM in a chain reaction manner, and to avoid the fusion damage of the filter with catalyst.

[0130] Moreover, the regeneration mode operation is entered based on the PM accumulated estimation value by the computation, the regeneration processing of the filter with catalyst can be performed at an optimal timing. Therefore, the particulate can be captured, burned and removed efficiently, all the way preventing the fuel efficiency from deteriorating.

[0131] Furthermore, a preliminarily heating is performed by the elevation of exhaust gas temperature and the oxidation catalyst is preheated when the regeneration mode operation starts, and then the post injection is performed, allowing to prevent generation of white smoke, that otherwise appears often during the regeneration start.

Claims

1. A diesel particulate filter unit (1) comprising; a filter (4) for capturing particulates in the exhaust gas (G) of diesel engine (E), an exhaust pressure sensors (51, 52) disposed in an exhaust passage (2) and a

regeneration control means (50) for starting a regeneration operation of said filter (4), according to the judgment results based on a comparison between exhaust pressures (P_e , P_{eb}) measured by the exhaust pressure sensors (51, 52) and a predetermined exhaust pressure judgment value (ΔP_{es} , P_{es} , Res), and regenerating said filter (4) by removing particulates captured by said filter (4) through combustion or chemical reaction by a catalyst, wherein

said regeneration control means (50) is configured to estimate the ash accumulated quantity (SAsh) of ash leaked into the exhaust gas (G) and accumulated in said filter (4), and correct said exhaust pressure judgment value (ΔP_{es} , P_{es} , Res) for judging the regeneration operation start based on the ash accumulated estimation quantity (SAsh).

2. The diesel particulate filter unit of claim 1, wherein the regeneration control means (50) calculates an ash quantity (Ash) accumulated in said filter (4) during an engine operation state, from a torque (Q) of the engine (E) and an engine speed (N_e), and calculates the ash accumulated estimation value (SAsh), through the cumulative computation of the calculated ash quantity (Ash).
3. The diesel particulate filter unit of claim 1 or claim 2, wherein the regeneration control means (50) calculates an exhaust pressure coefficient (α_1) corresponding to said ash accumulated estimation value (SAsh), and corrects said exhaust pressure judgment value (ΔP_{es} , P_{es} , Res), to a value determined by multiplying a reference judgment value (ΔP_{e0} , P_{e0} , ReO) by the exhaust pressure coefficient (α_1).
4. The diesel particulate filter unit of claim 3, wherein the regeneration control means (50) calculates said reference judgment value (ΔP_{e0} , P_{e0} , ReO), from the torque (Q) of the engine (E) and the engine speed (N_e), when the exhaust pressure (P_e , P_{eb}) for judging the regeneration start timing is measured by said exhaust pressure sensors (51, 52).
5. A continuous regeneration type diesel particulate filter unit (1A) comprising; a filter with catalyst (4) for capturing particulates in the exhaust gas (G) from a diesel engine (E) and, burning the captured particulates by catalytic action, wherein an oxidation catalyst (3) is disposed upstream the filter with catalyst (4), for raising the exhaust gas temperature through oxidation of HC and CO in the exhaust gas.
6. The continuous regeneration type diesel particulate filter unit of claim 5, comprising; a regeneration control means (50) for performing a regeneration

processing against the clogging of said filter with catalyst (4) and, wherein said regeneration control means (50) is configured to activate said oxidation catalyst (3) by raising the exhaust gas temperature through fuel injection control of the engine (E), during regeneration of said filter with catalyst (4) under an engine operation condition where the exhaust gas temperature of the engine (E) is lower than an activation temperature of said oxidation catalyst (3), to burn and remove particulates captured by said filter with catalyst (4).

7. The continuous regeneration type diesel particulate filter unit of claim 6, configured to raise the exhaust gas temperature by said fuel injection control in multiple stages equal or superior to two (2) stages.
8. The continuous regeneration type diesel particulate filter unit of claim 6 or 7, wherein said fuel injection control is configured to comprise, at least, either one of retard operation of main injection or post injection operation.
9. In a diesel particulate filter unit (1) comprising; a filter (4) for capturing particulates in the exhaust gas (G) of diesel engine (E), exhaust pressure sensors (51, 52) disposed in an exhaust passage (2) and a regeneration control means (50) for starting a regeneration operation of said filter (4), according to the judgment results based on a comparison between exhaust pressures (P_e , P_{eb}) measured by the exhaust pressure sensors (51, 52) and a predetermined exhaust pressure judgment value (ΔP_{es} , P_{es} , Res), and regenerating said filter (4) by removing particulates captured by said filter (4) through combustion or chemical reaction by a catalyst, a regeneration control method of the diesel particulate filter unit, comprising the steps of; estimating an ash accumulated quantity (SAsh) of ash leaked into the exhaust gas (G) and accumulated in said filter (4), and correcting said exhaust pressure judgment value (ΔP_{es} , P_{es} , Res) for judging the regeneration operation start based on an ash accumulated estimation quantity (SAsh).
10. The regeneration control method of the diesel particulate filter unit of claim 9, comprising the steps of; calculating an ash quantity (Ash) accumulated in said filter (4) during an engine operation state, from the torque (Q) of the engine (E) and the engine speed (N_e), and calculating the ash accumulated estimation value (SAsh), through the cumulative computation of the calculated ash quantity (Ash).
11. The regeneration control method of the diesel particulate filter unit of claim 10, comprising the steps of; calculating an exhaust pressure coefficient (α_1) corresponding to said ash accumulated estimation

value (SAsh), and correcting said exhaust pressure judgment value (ΔP_{es} , P_{es} , R_{es}), to a value determined by multiplying a reference judgment value (ΔP_{e0} , P_{e0} , R_{e0}) by the exhaust pressure coefficient (α_1).

12. The regeneration control method of the diesel particulate filter unit of claim 11, comprising the steps of; calculating said reference judgment value (ΔP_{e0} , P_{e0} , R_{e0}), from the torque (Q) of the engine (E) and the engine speed (Ne), when the exhaust pressures (P_e , P_{eb}) for judging the regeneration start timing are measured by said exhaust pressure sensors (51, 52).
13. In a continuous regeneration type diesel particulate filter unit (1A) comprising; a filter with catalyst (4) for capturing particulates in the exhaust gas (G) from a diesel engine (E), and burning the captured particulates by catalytic action, and an oxidation catalyst (3) disposed upstream the filter with catalyst (4), for raising the exhaust gas temperature through oxidation of HC and CO in the exhaust gas, a regeneration control method of the continuous regeneration type diesel particulate filter unit, comprising the steps of; raising the exhaust gas temperature through fuel injection control of the engine (E), during regeneration of said filter with catalyst (4) under an engine operation condition where the exhaust gas temperature of the engine (E) is lower than the activation temperature of said oxidation catalyst (3), in order to burn and remove particulates captured by said filter with catalyst (4).
14. The regeneration control method of the continuous regeneration type diesel particulate filter unit of claim 13, comprising a step of; raising the exhaust gas temperature by said fuel injection control in multiple stages equal or superior to two (2) stages.
15. The regeneration control method of the continuous regeneration type diesel particulate filter unit of claim 13 or 14, wherein said fuel injection control is configured to comprise, at least, either one of retard operation of main injection or post injection operation.
16. The regeneration control method of the continuous regeneration type diesel particulate filter unit of claim 15, comprising the steps of; raising, during said regeneration, at first, the exhaust gas temperature through retard operation of fuel main injection, and raising further the exhaust gas temperature by adding the fuel post injection operation, when the temperature (T_e) of the exhaust gas (G) flowing into said filter with catalyst (4) attains a predetermined first target temperature value (T_{e1}).

17. The regeneration control method of the continuous regeneration type diesel particulate filter unit of claim 16, comprising the steps of; further raising the exhaust gas temperature, by increasing the injection quantity of fuel post injection, after the temperature (T_e) of the exhaust gas (G) flowing into said filter with catalyst (4) attains a predetermined second target temperature value (T_{e2}) by a post injection of fuel of a given quantity, during said fuel post injection operation.
18. The regeneration control method of the continuous regeneration type diesel particulate filter unit of one of claims 13 to 17, comprising the steps of; estimating the quantity of particulate to be accumulated in said filter with catalyst (4) during the operation of an engine (E) and the quantity of particulate to be burned and removed, from the operation state of the engine, calculating the accumulated estimation value (PMs) of particulate by cumulative computation, and judging the regeneration start by using whether the accumulated estimation quantity (PMs) of the particulate has exceeded a predetermined accumulation quantity (PMmax) or not.

Fig. 1

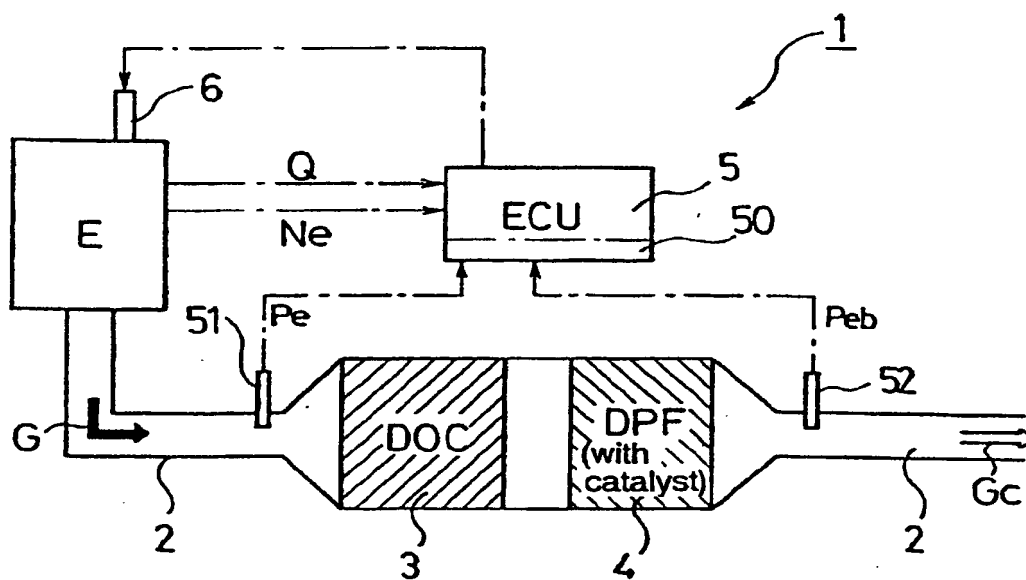


Fig. 2

[Judgment flow of regeneration start timing]

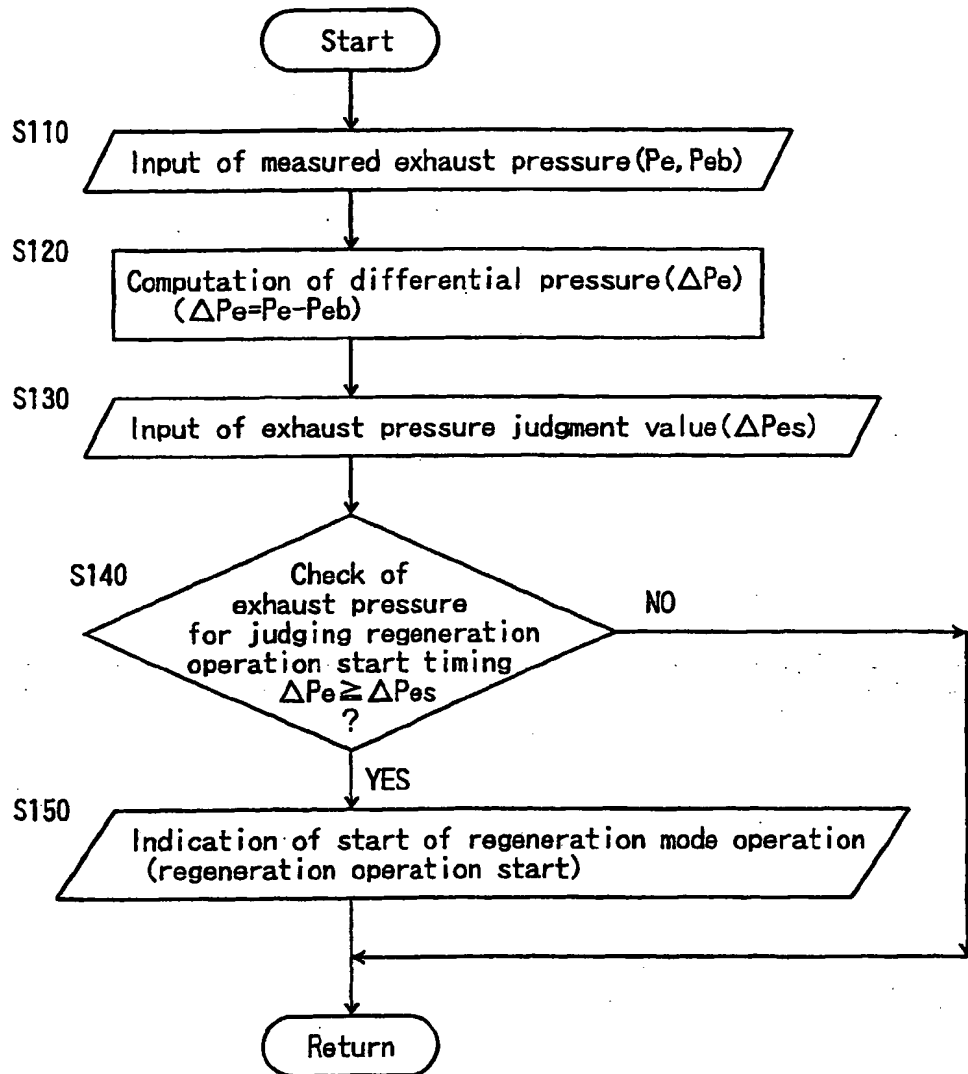


Fig. 3

[Correction flow of exhaust pressure judgment value]

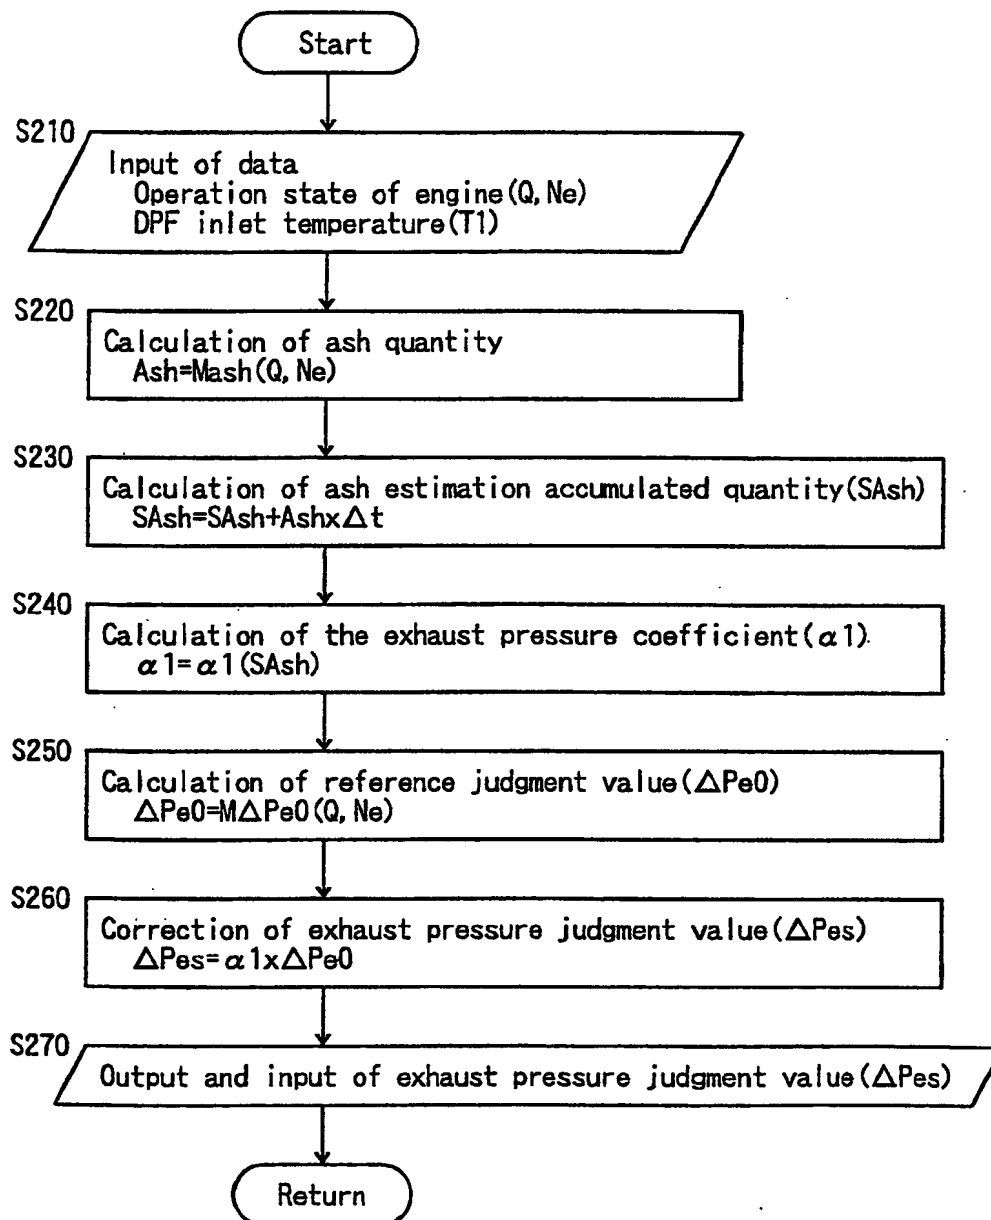


Fig. 4

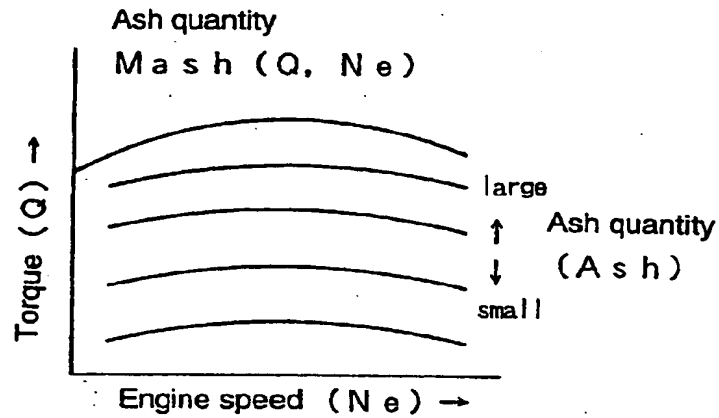


Fig. 5

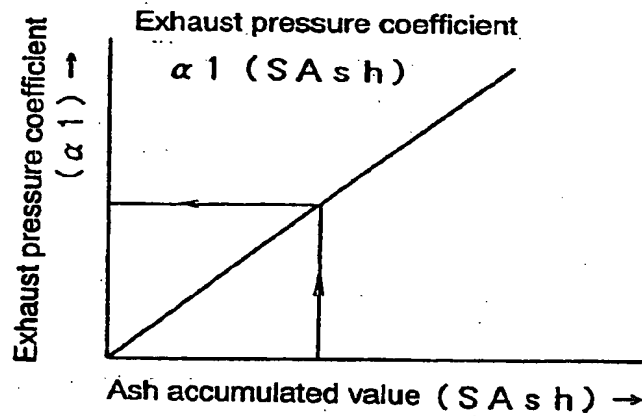


Fig. 6

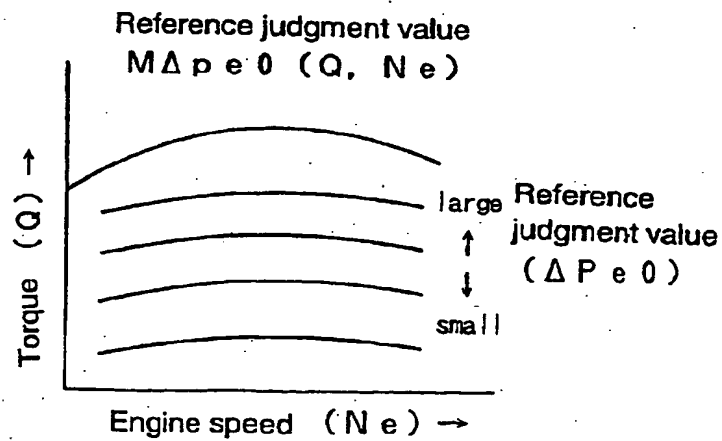


Fig. 7

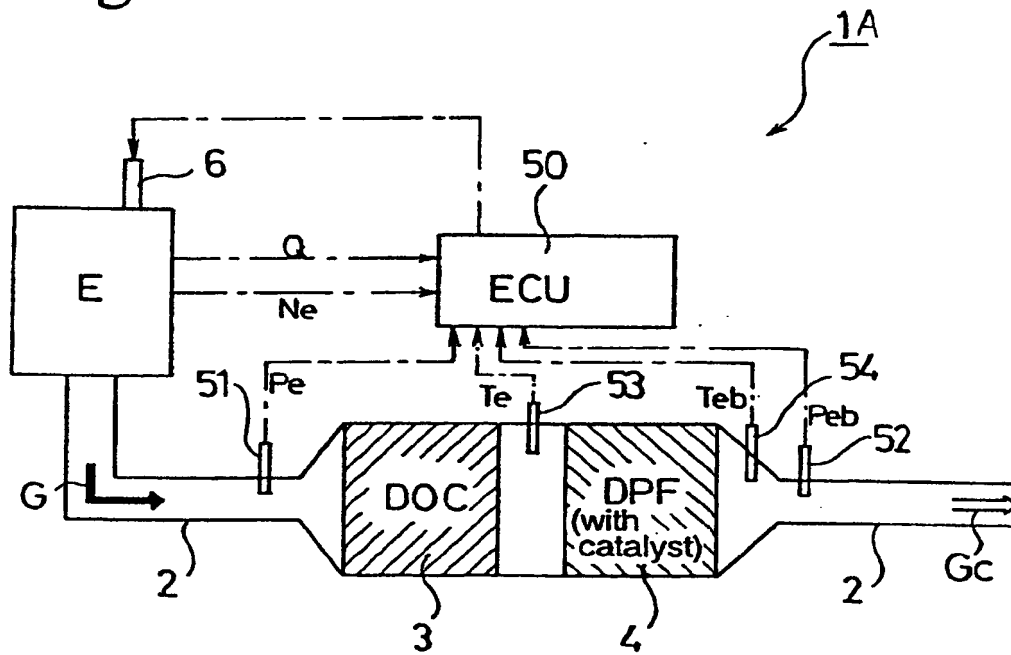


Fig. 8

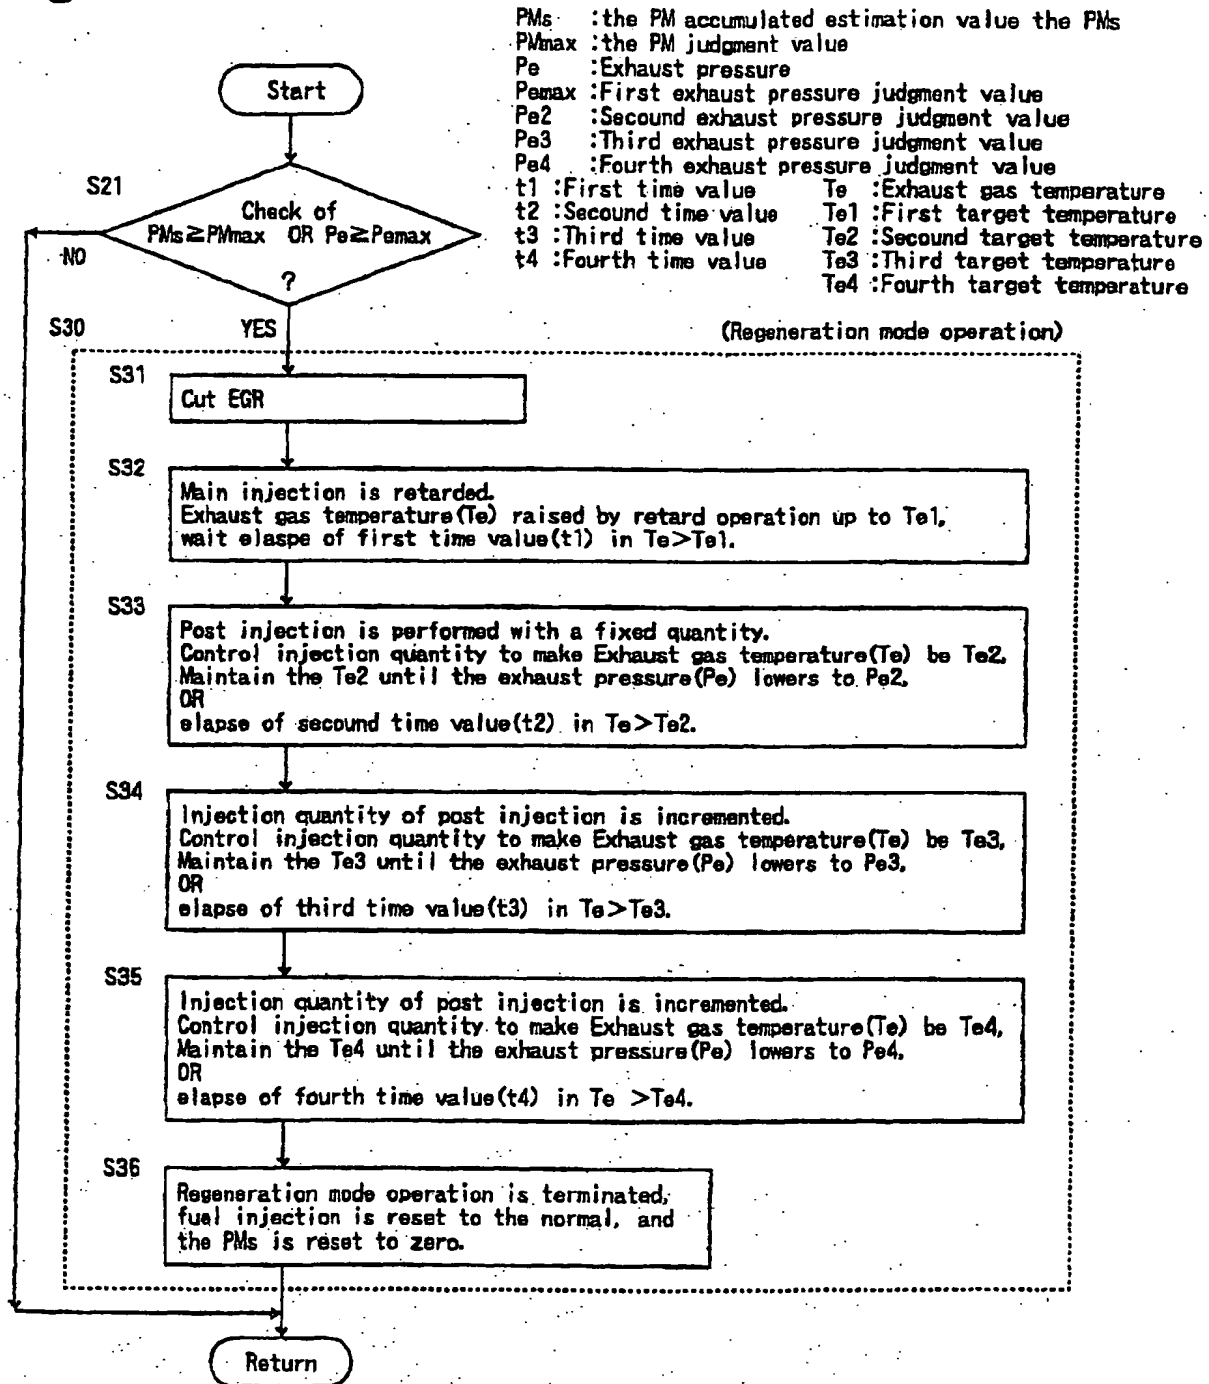


Fig. 9

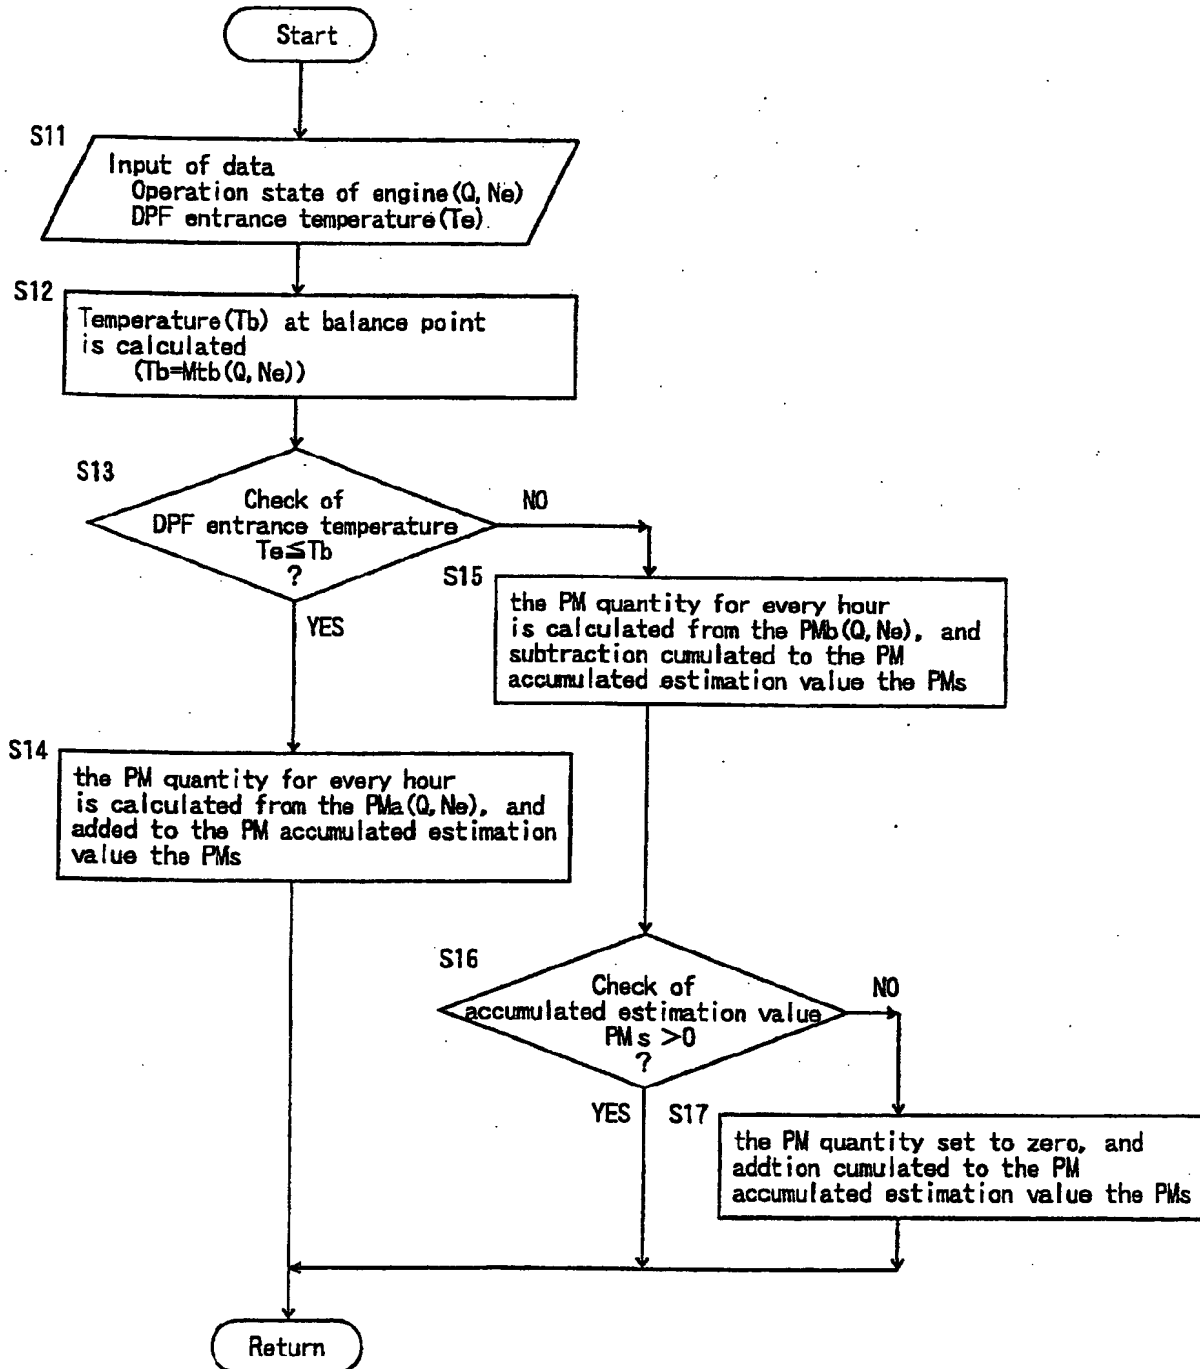


Fig. 10

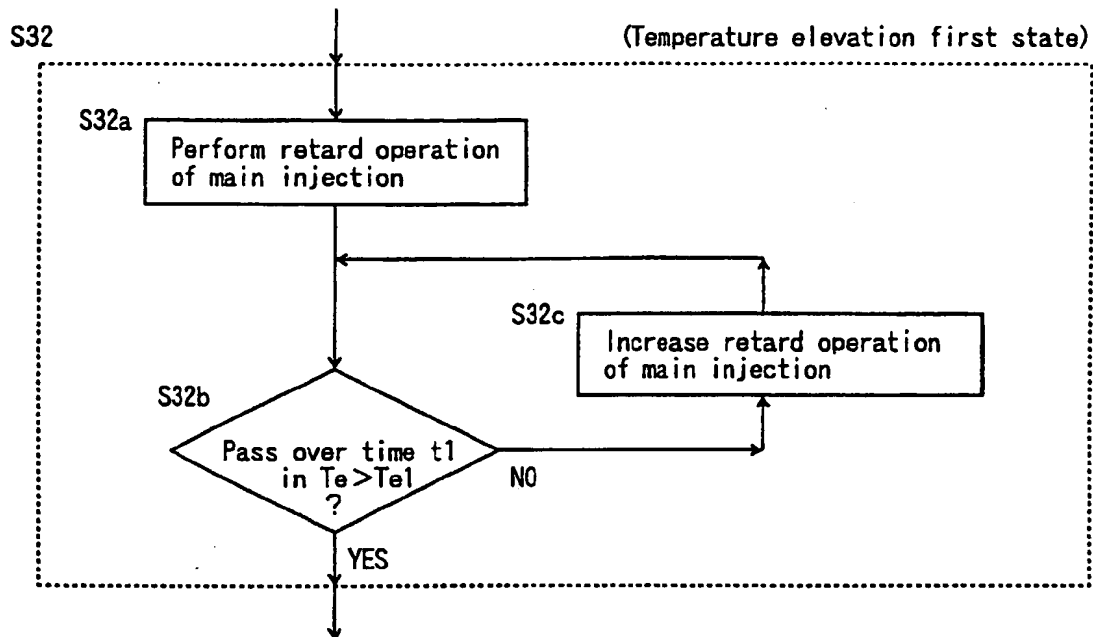


Fig. 11

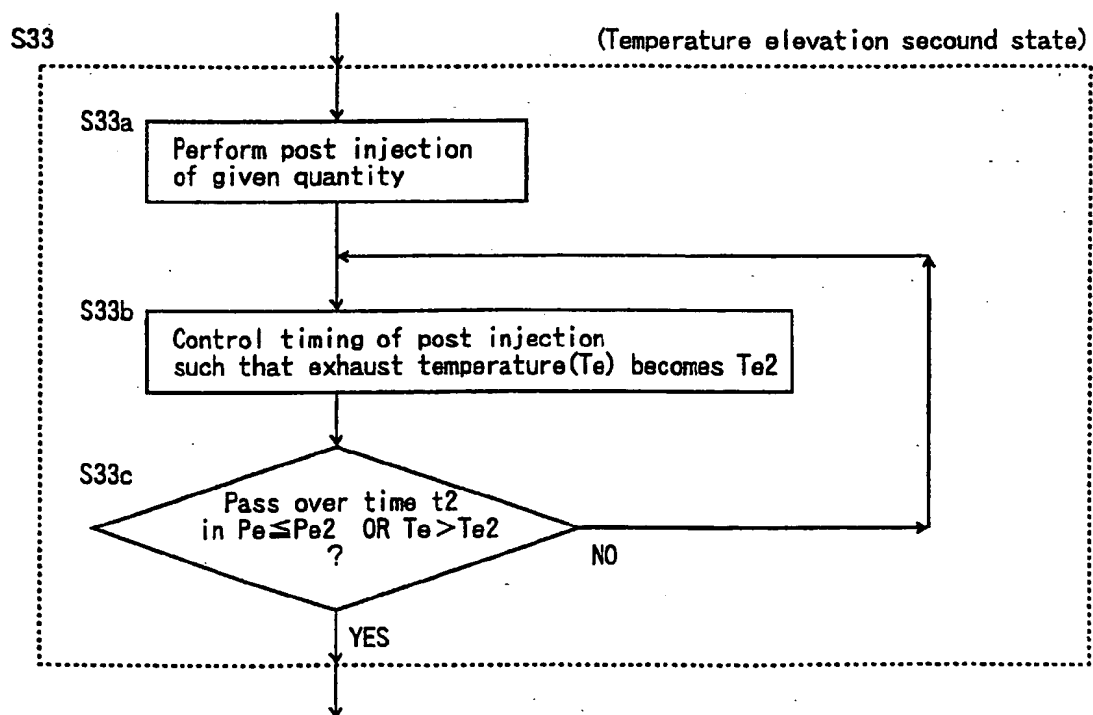


Fig. 12

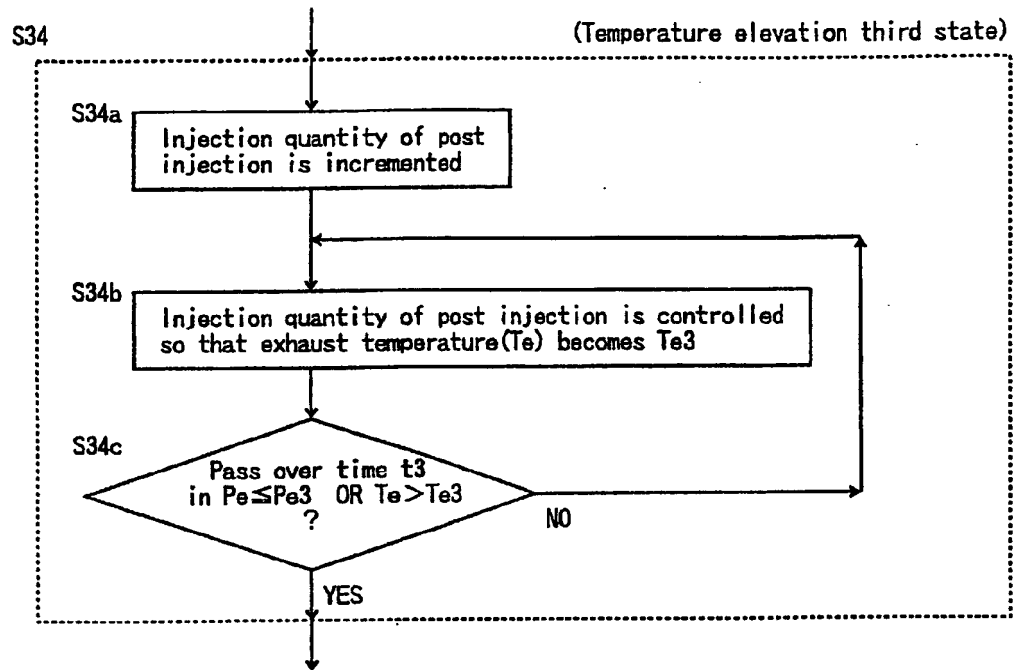


Fig. 13

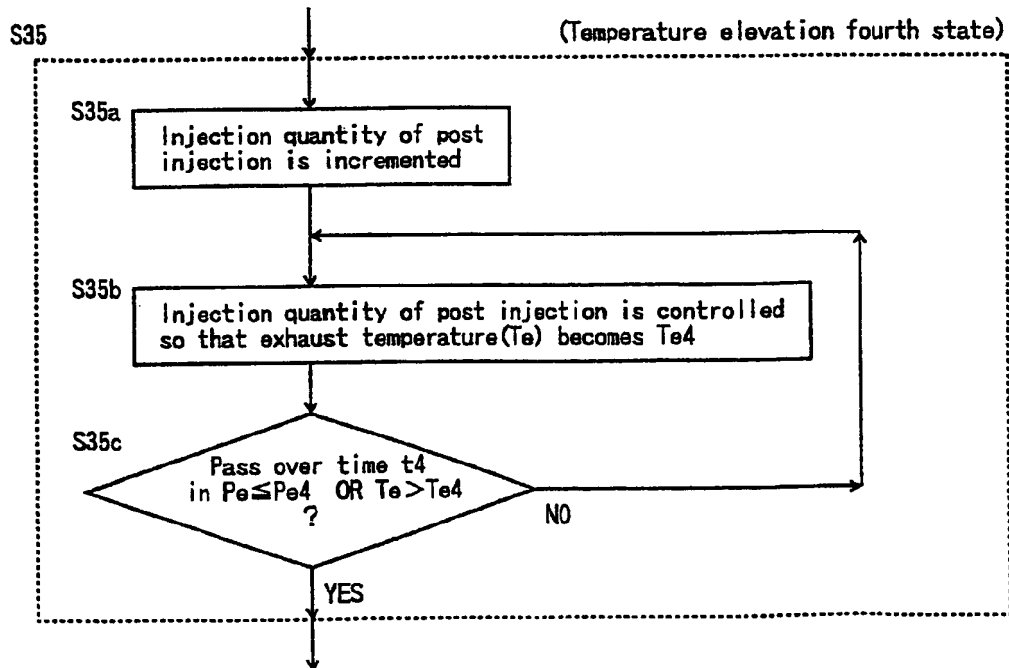


Fig. 14



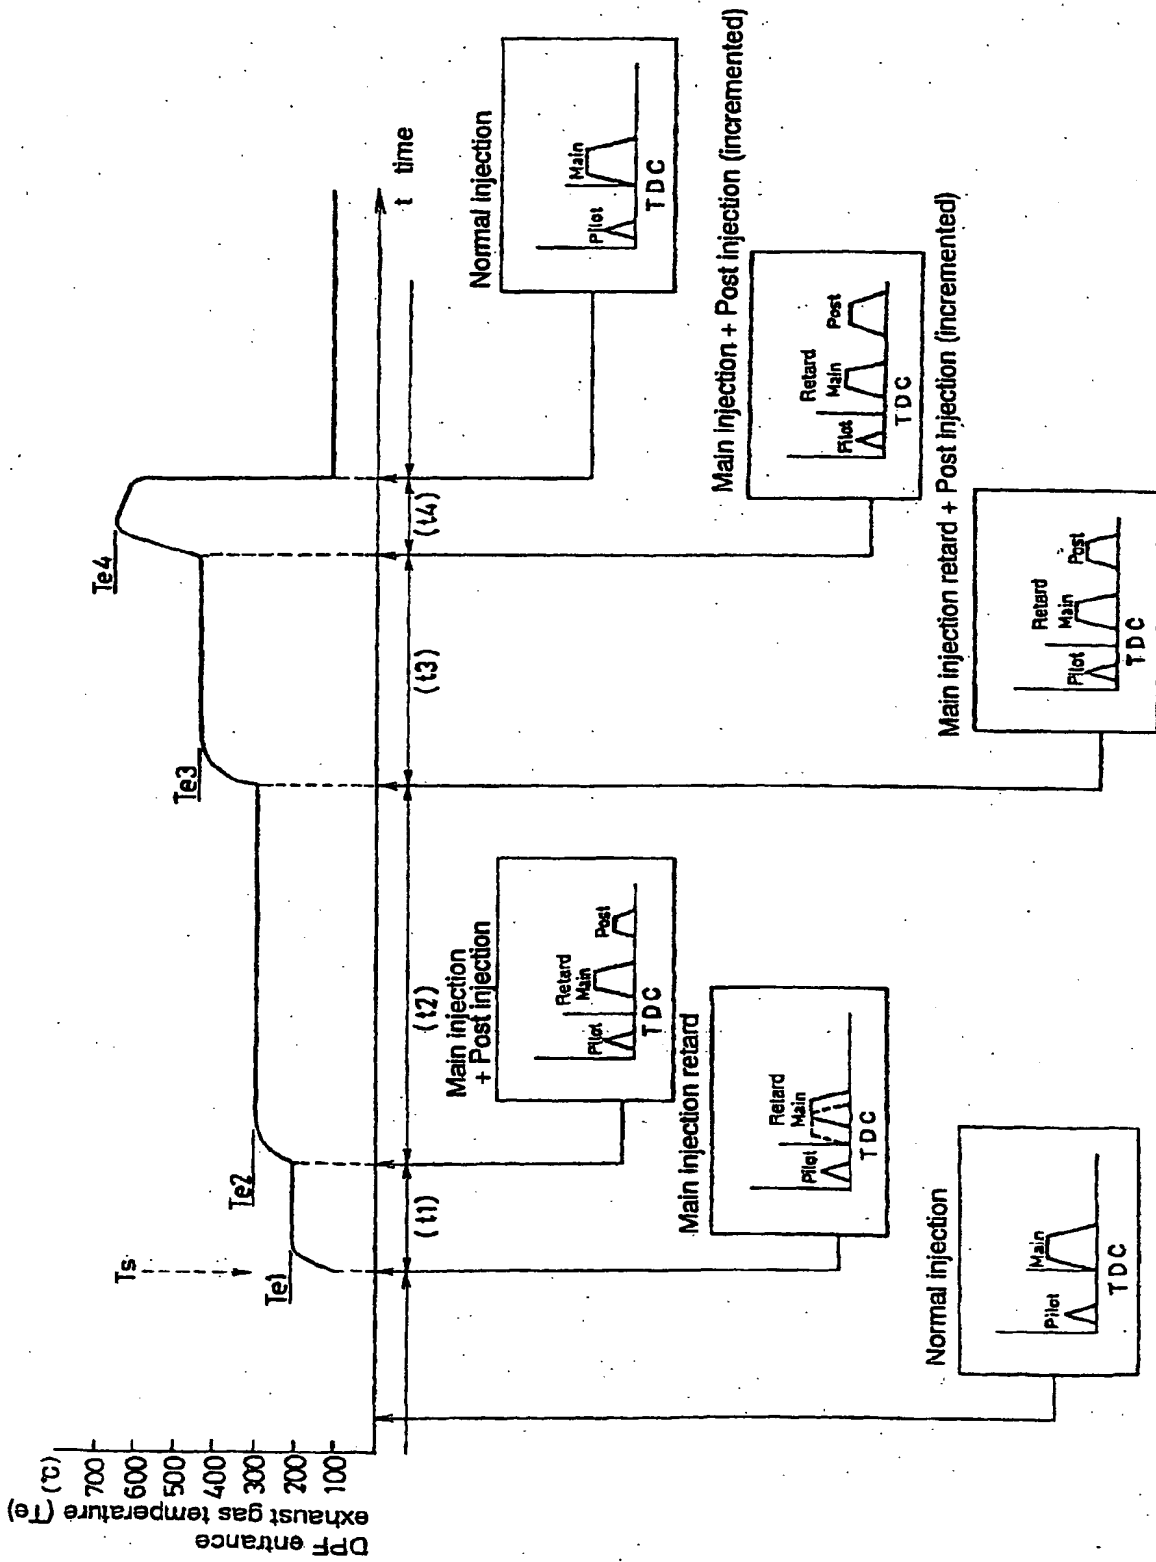


Fig. 15

(a)

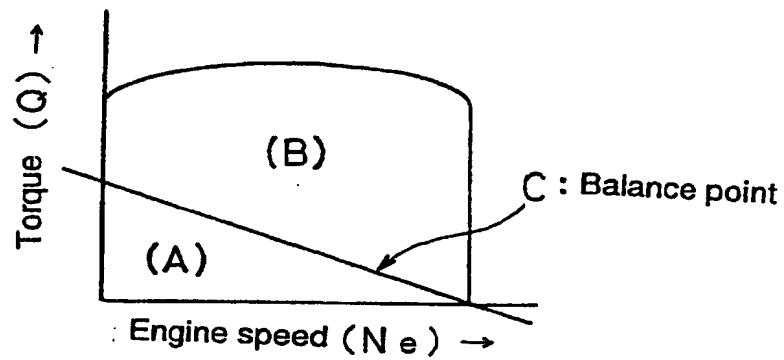

(b)

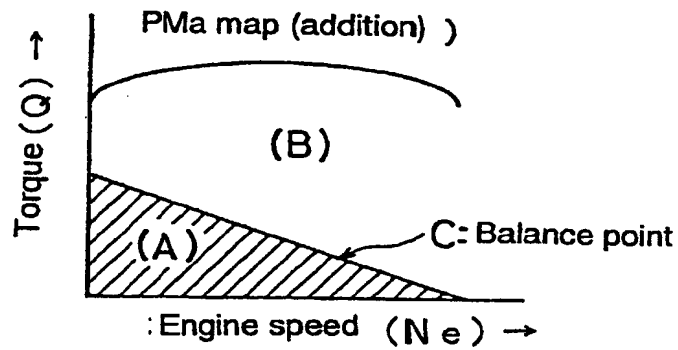

(c)

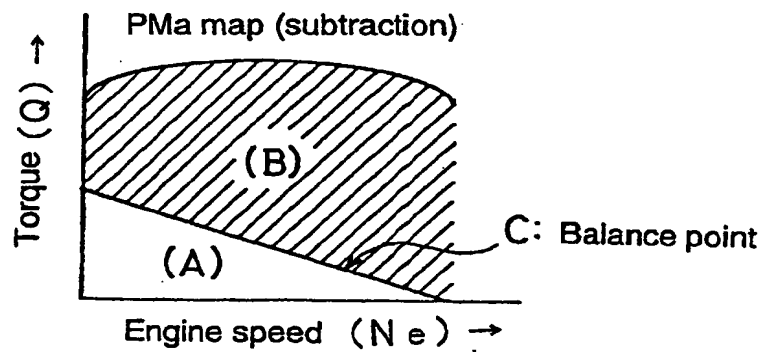


Fig. 16

(a) PMs






(b) ($PM1 \leq PM_s < PM2$)(c) ($PM2 \leq PM_s < PM3$)

Fig. 17





Europäisches Patentamt
European Patent Office
Office européen des brevets

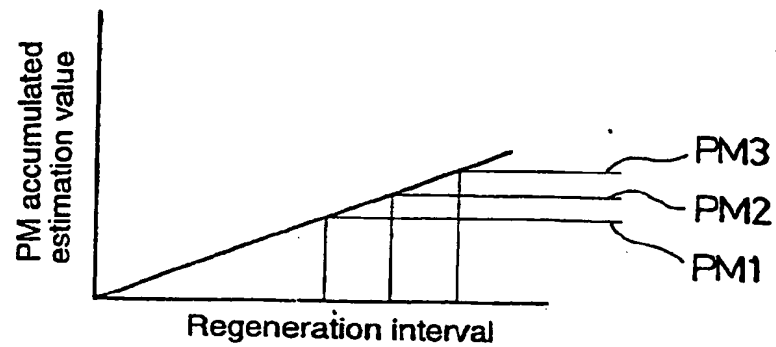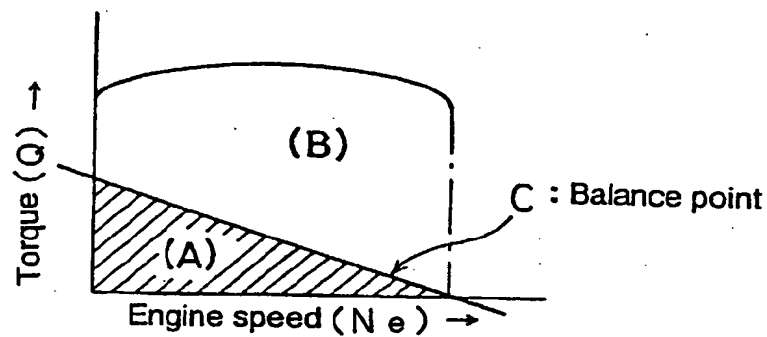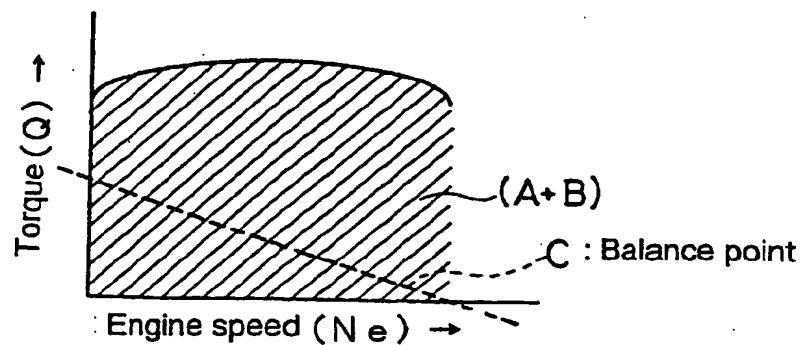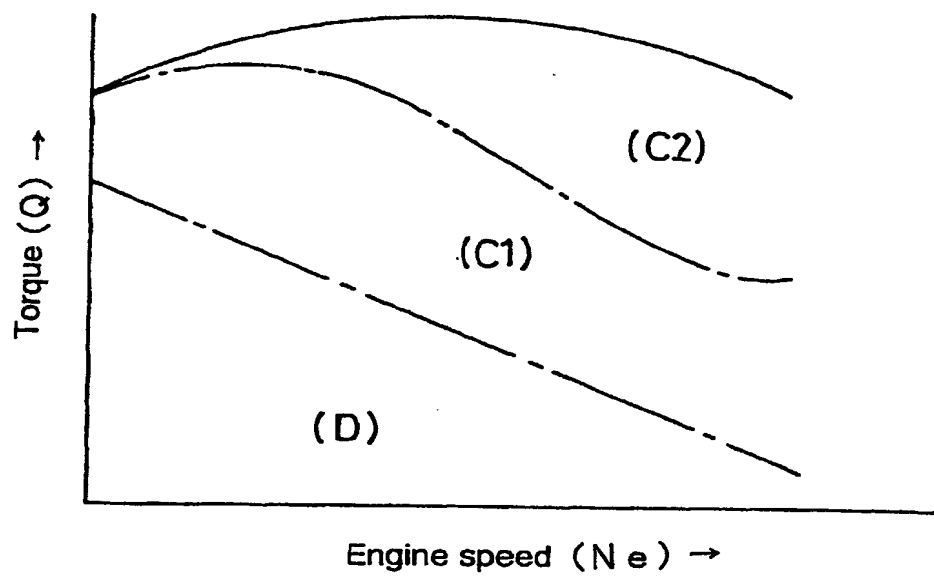

(11) EP 1 234 959 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
03.12.2003 Bulletin 2003/49

(51) Int Cl.7: F01N 9/00, F01N 3/023,
F02D 41/02, F01N 3/035,
F02D 41/40, F01N 3/025

(43) Date of publication A2:
28.08.2002 Bulletin 2002/35

(21) Application number: 02003221.5

(22) Date of filing: 20.02.2002

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

- Imai, Takchito Isuzu Motors Ltd.
Fujisawa-shi, Kanagawa-ken (JP)
- Suzuki, Tsuneo Isuzu Motors Ltd.,
Fujisawa-shi, Kanagawa-ken (JP)
- Ochi, Naofumi
Isuzu Motors Ltd., Fujisawa Factory
Kanagawa-ken (JP)
- Gabe, Masashi Isuzu Motors Ltd.,
Kanagawa-ken (JP)

(30) Priority: 21.02.2001 JP 2001044445
22.02.2001 JP 2001046993

(71) Applicant: ISUZU MOTORS LIMITED
Shinagawa-ku, Tokyo (JP)

(72) Inventors:
• Tashiro, Yoshihisa Isuzu Motors Ltd.
Fujisawa-shi, Kanagawa-ken (JP)


(74) Representative: Weber, Roland, Dipl.-Chem. et al
Weber, Seiffert, Lieke
Taunusstrasse 5a
65183 Wiesbaden (DE)

(54) Diesel particulate filter unit and regeneration control method of the same

(57) A diesel particulate filter unit 1 comprising a filter 4 for capturing particulates in the exhaust gas G of an engine E, and a regeneration control means 50 judging the start of the regeneration operation of said filter 4, according to the comparison between the value measured by exhaust pressure sensors 51, 52 and a predetermined exhaust pressure judgment value ΔP_{es} , P_{es} , R_{es} wherein said regeneration control means 50 is configured to estimate the ash accumulated quantity S_{Ash}

of ash leaked into the exhaust gas G and accumulated in said filter 4, and correct said exhaust pressure judgment value ΔP_{es} , P_{es} , R_{es} for judging the regeneration operation start based on this. Thereby, a diesel particulate filter that can judge the regeneration start timing appropriately, taking accumulation and deposit of ash generated from lubricant oil on the filter into consideration, and remove particulates efficiently all the way preventing the filter from clogging is provided.

Fig. 1

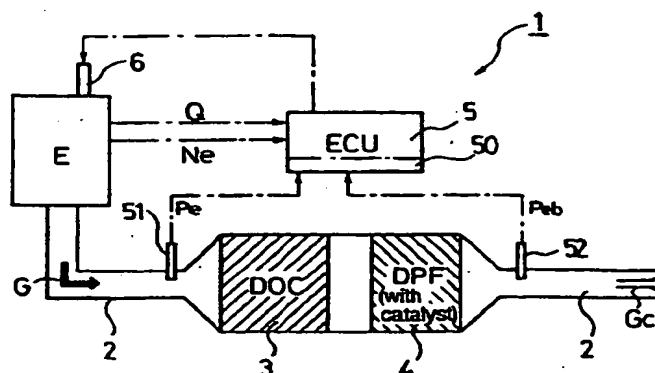



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 00 3221

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 287 698 A (KANESAKI NOBUKAZU ET AL) 22 February 1994 (1994-02-22)	1-4,9-12	F01N9/00 F01N3/023 F02D41/02 F01N3/035 F02D41/40 F01N3/025
Y	* column 7, line 25 - column 8, line 3 * * column 15, line 3 - column 17, line 28; figures 2,17A,17B *	18	
X	US 4 603 550 A (SHINZAWA MOTOHIRO) 5 August 1986 (1986-08-05) * column 10, line 12 - line 68; claims 1,5; figures 1,4 *	1-4,9-12	
X	US 4 424 671 A (TOKURA NAOMI) 10 January 1984 (1984-01-10) * column 4, line 1 - line 26; figures 1,2 *	1,9	
X	PATENT ABSTRACTS OF JAPAN vol. 013, no. 335 (M-856), 27 July 1989 (1989-07-27) & JP 01 113512 A (ISUZU MOTORS LTD), 2 May 1989 (1989-05-02) * abstract *	1,9	
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 159 (M-1389), 29 March 1993 (1993-03-29) & JP 04 325707 A (TOYOTA MOTOR CORP), 16 November 1992 (1992-11-16) * abstract *	1,9	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
E	EP 1 195 501 A (ISUZU CERAMICS RES INST CO LTD) 10 April 2002 (2002-04-10) * column 3, line 26 - line 51 * * column 4, line 21 - line 31 * * column 7, line 44 - line 53; figures 1,2 *	1-4,9-12	F01N F02D
-/-			
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 1 October 2003	Examiner Zebst, M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 180 (04/02) (P4001)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 00 3221

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 7)
X	FR 2 774 427 A (PEUGEOT) 6 August 1999 (1999-08-06)	13-15	
Y	* abstract; claim 1; figure 1 *	18	
E	FR 2 802 972 A (RENAULT) 29 June 2001 (2001-06-29) * page 2, line 25 - line 30 * * page 7, line 37 - page 8, line 4 * * page 8, line 37 - page 9, line 10 * * page 11, line 5 - line 9 * * page 15, line 27 - line 37; figure 1 *	13-15	
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 03, 30 March 2000 (2000-03-30) & JP 11 336530 A (NISSAN MOTOR CO LTD), 7 December 1999 (1999-12-07) * abstract *	1-18	
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 09, 30 July 1999 (1999-07-30) & JP 11 101122 A (HINO MOTORS LTD), 13 April 1999 (1999-04-13) * abstract *	1-18	TECHNICAL FIELDS SEARCHED (Int. Cl. 7)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 1 October 2003	Examiner Zebst, M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1500 01.02 (96/C01)



European Patent
Office

Application Number
EP 02 00 3221

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

**LACK OF UNITY OF INVENTION
SHEET B**

Application Number
EP 02 00 3221

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-4, 9-12

Diesel particulate filter unit comprising a filter, exhaust pressure sensors and regeneration control means based on exhaust pressure.

2. Claims: 5-8, 13-18

Continuous regeneration type diesel particulate filter unit comprising a filter with a catalyst, an oxidation catalyst disposed upstream and regeneration control means configured to activate said oxidation catalyst during regeneration of the filter.

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 00 3221

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-10-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5287698	A	22-02-1994	JP 2616074 B2	04-06-1997
			JP 3199613 A	30-08-1991
			JP 2616075 B2	04-06-1997
			JP 3199614 A	30-08-1991
			JP 2623879 B2	25-06-1997
			JP 3199615 A	30-08-1991
			JP 2626111 B2	02-07-1997
			JP 3199616 A	30-08-1991
			DE 4041917 A1	04-07-1991
			DE 4042562 C2	03-04-1997
			DE 4042563 C2	03-04-1997
			FR 2657649 A1	02-08-1991
			GB 2239407 A ,B	03-07-1991
			KR 9409048 B1	29-09-1994
			US 5319930 A	14-06-1994
			US 5195316 A	23-03-1993
US 4603550	A	05-08-1986	JP 60187709 A	25-09-1985
US 4424671	A	10-01-1984	NONE	
JP 01113512	A	02-05-1989	JP 2581110 B2	12-02-1997
JP 04325707	A	16-11-1992	NONE	
EP 1195501	A	10-04-2002	JP 2002115525 A	19-04-2002
			JP 2002295237 A	09-10-2002
			EP 1195501 A2	10-04-2002
			US 2002038545 A1	04-04-2002
FR 2774427	A	06-08-1999	FR 2774427 A1	06-08-1999
FR 2802972	A	29-06-2001	FR 2802972 A1	29-06-2001
			EP 1240415 A2	18-09-2002
			WO 0148358 A2	05-07-2001
JP 11336530	A	07-12-1999	NONE	
JP 11101122	A	13-04-1999	JP 3390641 B2	24-03-2003

EPO FORM P0439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82